

MEMORANDUM  
RM-5297-PR  
APRIL 1967

PSEUDO-COLOR PROCESSING  
OF ELECTRONIC PHOTOGRAPHS

C. Gazley, Jr., J. E. Rieber and R. H. Stratton

PREPARED FOR:  
UNITED STATES AIR FORCE PROJECT RAND

---

*The* **RAND** *Corporation*  
SANTA MONICA • CALIFORNIA

---

MEMORANDUM

RM-5297-PR

APRIL 1967

PSEUDO-COLOR PROCESSING  
OF ELECTRONIC PHOTOGRAPHS

C. Gazley, Jr., J. E. Rieber and R. H. Stratton

This research is supported by the United States Air Force under Project RAND—Contract No. F44620-67-C-0045—monitored by the Directorate of Operational Requirements and Development Plans, Deputy Chief of Staff, Research and Development, Hq USAF. Views or conclusions contained in this Memorandum should not be interpreted as representing the official opinion or policy of the United States Air Force.

DISTRIBUTION STATEMENT

Distribution of this document is unlimited.

---

The RAND Corporation

1700 MAIN ST. • SANTA MONICA • CALIFORNIA • 90406



PREFACE

RAND's recent concern with the enhancement of visual discrimination and the contact of staff members with advanced researchers in medicine combined to germinate the work reported here. The goal set was to improve and extend the medical pseudo-color technique used to study the distribution of radioactivity in a gland for the enhancement of visual discrimination in a black-and-white photograph. In the study reported here, one successful innovation was the use of the S-C 4020 computer-driven plotting system. Also the increase to 64 color gradations (instead of the earlier ten) was successful in substantially increasing the information visually available in a black-and-white photograph.



ABSTRACT

The ability to use "black-and-white" photographic information is limited by the observer's ability to distinguish shades of gray. This Memorandum describes a "pseudo-color" process which enhances visual discrimination by keying measured light intensity in a photograph to color. Test data obtained from the camera system of the Mariner IV have been processed as an example, and the resulting pseudo-color photograph is shown.



ACKNOWLEDGMENT

The authors wish to thank Barry W. Boehm of The RAND Corporation for much help and timely encouragement.



CONTENTS

PREFACE .....	iii
ABSTRACT .....	v
ACKNOWLEDGMENT .....	vii
PSEUDO-COLOR PROCESSING OF ELECTRONIC PHOTOGRAPHS .....	1
Appendix	
COMPUTER PROGRAMS AND CONTROL CARDS USED TO PROCESS THE TEST TAPE FROM THE MARINER IV CAMERA SYSTEM.....	9
REFERENCES .....	20



PSEUDO-COLOR PROCESSING OF ELECTRONIC PHOTOGRAPHS\*

The "photograph" reproduced on the facing page is actually a pseudo-color presentation of test data from the camera system of the Mariner IV. The original test photograph (black and white) was a Mariner's eye view of a relief map of a Southern California area. The reproduction is an offprint from the April cover of Astronautics and Aeronautics, a publication of the American Institute of Aeronautics and Astronautics.

A high-quality "black-and-white" photograph customarily records the graded intensities of light in a scene by means of a series of shades of gray ranging from near black to near white. In viewing such a record, the observer's ability to "use" the recorded gradations, i.e., to detect patterns, recognize objects, and discriminate between objects having different intensities, is limited by his ability to detect differences among various shades of gray.

Modern photographic techniques, whether chemical or electronic, can separate and record many more tonal values than can the eye. The Mariner's camera system can discriminate among 64 intensity levels,<sup>(1)</sup> but the human visual system can discriminate only about 15 shades of gray between black and white.<sup>(2)</sup>

Hence, for man to take advantage of the superior discrimination of a camera system, the information should be so presented that the observer can distinguish any recorded level of intensity from any other.

---

\*This work was supported by the United States Air Force under Project RAND.

\*\*Original test data for the pseudo-color processing of the Mariner-Mars 1964 camera photographs were provided through the courtesy of the Jet Propulsion Laboratory, California Institute of Technology.

Accordingly we decided to make use of man's excellent color-discrimination.<sup>(3)</sup> The human eye can distinguish many thousands of colors, the exact number depending on the level of illumination. Thus by keying measured intensity level to color, pseudo-color can give an observer much more information than can a gray-scale. A recent example of the use of color coding to increase contrast is the work of Adams and Jaffe<sup>(4)</sup> who coded various levels of radioactive intensity to various colors for medical presentations. About ten colors are used in their process, and there are about as many colors in this pseudo-color transformation as there are discriminable shades of gray. The primary advantage thus gained is simply an enhanced effective contrast and an improved apparent resolution.

As a test of our pseudo-color presentation scheme, we used the data obtained from photographs of a relief map, made as a test of the Mariner's camera system. The digital output from the camera system consists of 200 lines of 200 elements each. Each picture element is coded with two octal digits representing an intensity level from 0 to 63, the 0 representing the lightest shade and the 63 the darkest. The information is coded line by line on magnetic tape, packed six elements to a standard 36-bit word.

By use of an IBM 7044 computer and a Stromberg-Carlson S-C 4020 peripheral plotting system, the information on the tape was converted into 64 successive black-and-white frames of 35-mm film. Each frame was used to mask out all the elements except those corresponding to a single intensity level. The processing consisted of three steps:

(1) the photo information on magnetic tape was unpacked and was used

to write 40,000 intermediate records, each containing a line number, an element number, and the corresponding intensity level; (2) the intermediate records were sorted by intensity level; and (3) the sorted records were processed to produce a control tape for the S-C 4020, which produced the 64 frames (the black-and-white frames accompanying this text are printed from the negative produced by the S-C 4020).

The 64 black-and-white frames were then copied successively onto a single frame (64 exposures) of 35-mm Kodachrome II daylight film. A different filter was used over the light source (electronic flash) for each exposure. Starting with shade number 0, the hue of the filter was red. Successive combinations of subtractive-wedge filters gradually shifted through orange, yellow, green, and cyan, and terminated with blue for shade 63. No nonspectral hues (magentas) were used. Thus, light areas in the original appear red, medium areas green, and dark areas blue. The accompanying color photograph is the result of this work. The two main problems in this transformation were (1) the frame-to-frame registration, both in the S-C 4020 camera system and in making the composite on color film, and (2) a magenta "wash" on the Kodachrome, which was caused by unwanted light passing through the dense areas of the black-and-white film.

A method is now being developed by which the 64 shades of gray may be re-formatted and masking areas added to make only four exposures necessary. These would be made through a minimum number of filters with obvious advantages for registration and fogging.

We hope soon to be able to apply the pseudo-color process to the Mariner's actual photographs of the Martian surface. We feel that the

pseudo-color technique shows great promise in the presentation of television data from space-exploration vehicles and weather satellites, and in the presentation of electronic medical data.

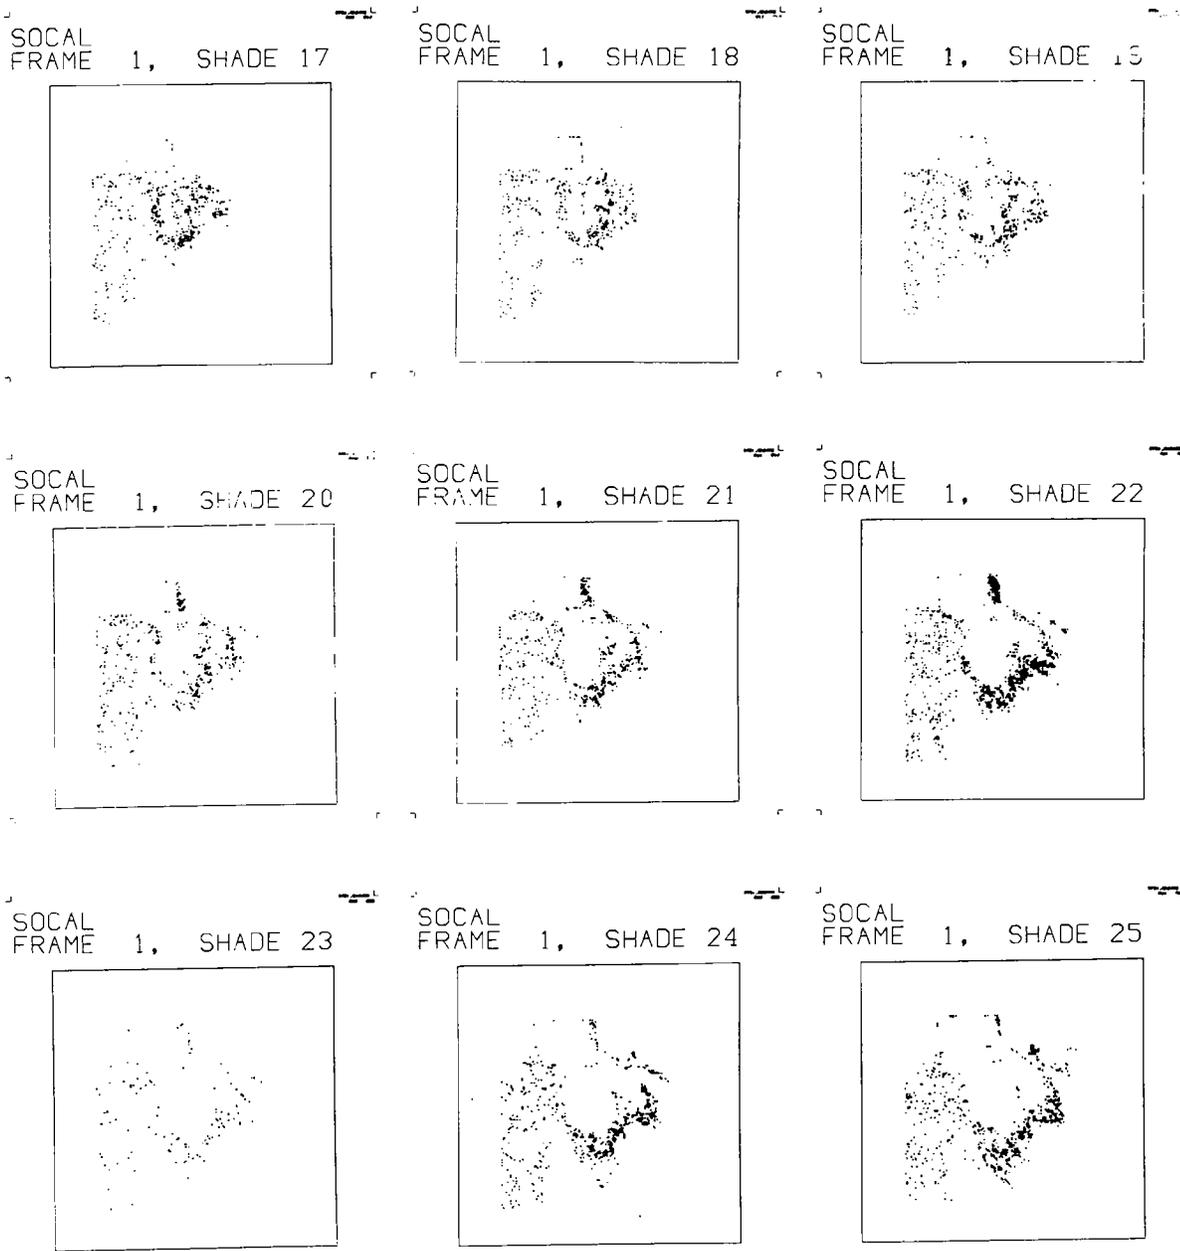


Fig. 2 -- This is part of the series of black-and-white masks made on the S-C 4020. A multiple exposure shot through each of these masks, using different colors, was used to make the color photograph.


SOCAL  
FRAME 1, SHADE 26




SOCAL  
FRAME 1, SHADE 27




SOCAL  
FRAME 1, SHADE 28

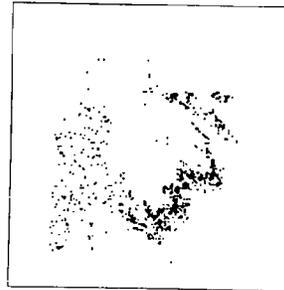

SOCAL  
FRAME 1, SHADE 29

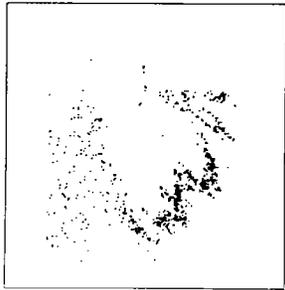

SOCAL  
FRAME 1, SHADE 30

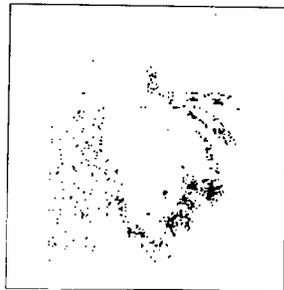

SOCAL  
FRAME 1, SHADE 31



SOCAL  
FRAME 1, SHADE 32




SOCAL  
FRAME 1, SHADE 33




SOCAL  
FRAME 1, SHADE 34



SOCAL  
FRAME 1, SHADE 35

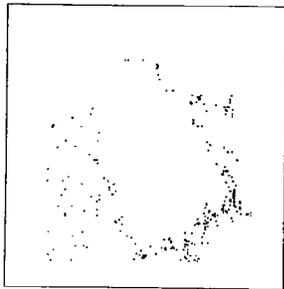

SOCAL  
FRAME 1, SHADE 36

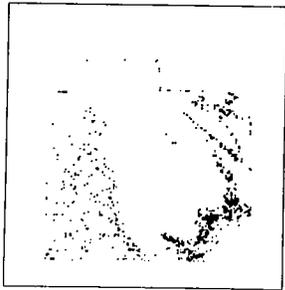

SOCAL  
FRAME 1, SHADE 37

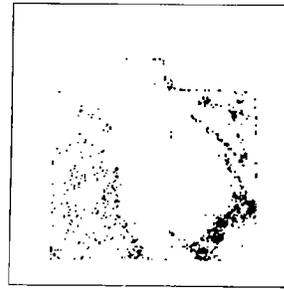


Fig. 2, continued

SOCAL  
FRAME 1, SHADE 38



SOCAL  
FRAME 1, SHADE 39




SOCAL  
FRAME 1, SHADE 40




SOCAL  
FRAME 1, SHADE 41




SOCAL  
FRAME 1, SHADE 42

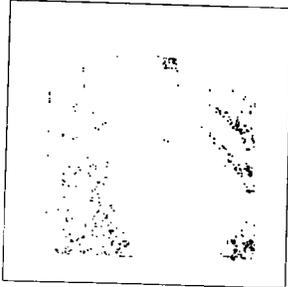

SOCAL  
FRAME 1, SHADE 43

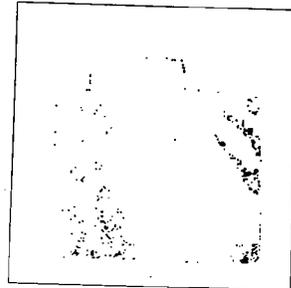

SOCAL  
FRAME 1, SHADE 44

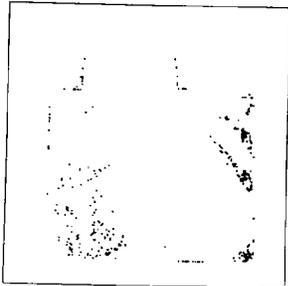

SOCAL  
FRAME 1, SHADE 45



SOCAL  
FRAME 1, SHADE 46



SOCAL  
FRAME 1, SHADE 47

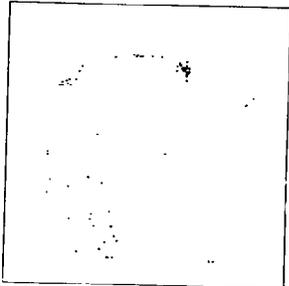


Fig. 2, continued



Appendix

COMPUTER PROGRAMS AND CONTROL CARDS USED TO PROCESS THE TEST  
TAPE FROM THE MARINER IV CAMERA SYSTEM

```
$JOB          5754,MARINR,R3500,15,250,130,P  PAL 25 USES SC-4020 SIMULATOR
$CLOSE       S.SUCC,REWIND
$CLOSE       S.SU08,REWIND
$CLOSE       S.SU09,REWIND
$IEJOB PRSORT MAP
$FILE PRSORT 'INTERM',U00,*,TYPE1,REEL,
$ETC PRSORT  BLOCK=1950,LRL=3,RCT=650,
$ETC PRSORT  ERR=RERRX.,EOF=REOFX.,EOR=REORX.
$FILE PRSORT 'INPUT',U09,*,TYPE1,REEL,
$ETC PRSORT  BLOCK=36,LRL=36,RCT=1,
$ETC PRSORT  ERR=RERRX.,EOF=REOFX.,EOR=REORX.
```

```
$IEFTC PRSORT
C
C UNPACK THE PHOTO INFORMATION FROM THE JPL TAPE AND PREPARE AN
C INPUT TAPE FOR SCRT.
C
COMMON /PCDP/ INREC(36), OUTREC(210)
DIMENSION TITLE(4)
INTEGER OUTREC
INTEGER CELLNO
C
C CLOSE INPUT FILE AND OPEN WITH A REWIND.
C
CALL CLSEIN
CALL OPENIN
C
C CLOSE INTERMEDIATE FILE AND OPEN WITH A REWIND.
C
CALL CLSINT
CALL OPNINT
C
C READ IN A BCD ARRAY TO BE USED TO IDENTIFY EACH SLIDE.
C
READ 4000, TITLE
PRINT 2001, TITLE
C
C READ IN THE FILE NUMBER (FRAME NUMBER) TO BE PROCESSED.
C
READ 3000, NFILE
PRINT 3000, NFILE
C
C N = NO. OF RECORDS ON FILE 'NFILE'.
C
READ 3000, N
PRINT 3000, N
C
C SKIP TO THE FILE TO BE PROCESSED ('C' IS A DUMMY ARGUMENT).
C
CALL SKIPF(C, NFILE-1)
C
W060 ('SKIPF') CLOSSES THE FILE WHEN SKIPPING. IT MUST BE
RE-OPENED WITHOUT REWINDING.
C
CALL OPENNR
C
THE FIRST THREE RECORDS CONTAIN TITLE AND FILE NO. INFORMATION,
WRITTEN IN A FORM THAT WILL SURVIVE SORTING.
C
CALL PUTREC(-3, TITLE(1), TITLE(2))
CALL PUTREC(-2, TITLE(3), TITLE(4))
CALL PUTREC(-1, NFILE, 7FRO)
C
DU 100 LINENO = 1, N
C
C READ IN A 36-WORD RECORD AND UNPACK IT TO MAKE A 200-WORD RECORD.
C ARRAY 'OUTREC' HAS 10 EXTRA WORDS TO ALLOW FOR SPILLOVER IN
C SUBROUTINE 'UNPACK'.
C
CALL GETREC
CALL UNPACK
C
```

```
C      NOW WRITE THE COLUMN, LINE NUMBER, AND CELL NUMBER (COLUMN) FOR
C      EACH CELL OF THE CURRENT LINE.
C
C          DO 10 CELLNO = 1, 200
C              CALL PUTREC(OUTREC(COLUMN), LINENO, CELLNO)
C      10      CONTINUE
C
C      100     CONTINUE
C
C      CLOSE AND REWIND THE INPUT AND INTERMEDIATE FILES.
C      THE INTERMEDIATE FILE WILL NOW BE PROCESSED BY SORT.
C
C          CALL CLSEIN
C          CALL CLSINT
C
C          STOP
C
C      2001 FORMAT(IX, 4A6)
C      3000 FORMAT(I4)
C      4000 FORMAT(4A6)
C      END
```

```
$IEMAP UNPACK
*      UNPACK THE 36 WORD MARINER RECORD INTO A 200 WORD RECORD.
*
*          PMC
*          CONTRL POOP
*          USE POOP
INREC BSS 36
*
*      SINCE 6*34 = 204, 'OUTREC' NEEDS 204 WORDS. THE EXTRA SIX WORDS
*      ARE JUST FOR SAFETY.
*
OUTREC BSS 210
*      USE
*
*          ENTRY UNPACK
UNPACK SAVE 1,2,4
*
*          AXT 210,4
*          AXT 34,1
*
LCCP1 CAL INREC+35,1
LCCP1 LDQ INREC+36,1
LCCP1 LGR 11
LCCP1 AXT 6,2
*
LCCP2 LGL 6
LCCP2 SAC OUTREC+210,4,5
LCCP2 TXI **1,4,-1
LCCP2 TIX LOOP2,2,1
*
*          TIX LOOP1,1,1
*
*      RETURN UNPACK
*      END
```

```
$IEMAP INPRTN
*      NECESSARY ROUTINES FOR FILE 'INPUT'.
*
      CONTRL POOP
      USE     POOP
INREC  BSS    36
OUTREC BSS    210
      USE
*
      EXTERN  INPLT
*
*      GET A 36-WORD RFCORD AND PLACE IT IN 'INREC'.
*
      ENTRY  GETREC
GETREC SAVE
      TSX    S.GETL,4
      PZE    INPUT,,INREC
      RETURN GETREC
*
*      OPEN THE INPUT FILE WITH A REWIND.
*
      ENTRY  OPENIN
OPENIN SAVE
      TSX    S.OPEN,4
      PTW    INPLT          REWIND,BINARY,INPUT
      RETURN OPENIN
*
*      CLOSE THE INPUT FILE WITH A REWIND.
*
      ENTRY  CLSEIN
CLSEIN SAVE
      TSX    S.CLSE,4
      PZE    INPUT          REWIND,NOUNLOAD,END-OF-DATA
      RETURN CLSEIN
*
*      OPEN THE INPUT FILE WITHOUT A REWIND.
*
      ENTRY  OPENNR
OPENNR SAVE
      TSX    S.OPEN,4
      MTW    INPUT          NOREWIND,BINARY,INPUT
      RETURN OPENNR
      END

$IRMAP INPUTV
*      SPECIAL 'UTVAR.' DECK TO BE USED WITH W060 ('SKIPF'). IT RETURNS
*      THE ADDRESS OF FILE 'INPUT', REGARDLESS OF THE ARGUMENT SUPPLIED.
*
      EXTERN  INPUT
*
      ENTRY  UTVAR.
UTVAR. NULL
      CLA    POINTR
      STO    2,4
      TRA    1,4
*
POINTR PZE    FILINP
FILINP PZE    INPUT
      END
```

```
$IBMAP OUTINT
*
* OUTPUT ROUTINES FOR FILE 'INTERM' - INTERMEDIATE FILE WHICH WILL
* BE PROCESSED BY SORT.
*
*   EXTERN  INTERM
*
*   PLACE A THREE WORD RECORD ON FILE 'INTERM'.
*
*   ENTRY  PUTREC
*   PMC
PUTREC SAVE
*
*   'SAVE' MACRO SETS XR4 TO COMPLEMENT OF CALLING ADDRESS.
*
*   CLA*   3,4           FIRST ARGUMENT
*   STD    BUFFER
*   CLA*   4,4           SECOND ARGUMENT
*   STC    BUFFER+1
*   CLA*   5,4           THIRD ARGUMENT
*   STD    BUFFER+2
*   TSX    S.PLTL,4
*   PZE    INTERM,,BUFFER
*   RETURN PUTREC
*   PMC
*
*   CLOSE INTERMEDIATE FILE WITH AN END-OF-FILE MARK AND REWIND.
*
*   ENTRY  CLSINT
*   SAVE
CLSINT TSX    S.CLSE,4
*   PZE    INTERM           REWIND,NOUNLOAD,END-OF-DATA
*   RETURN CLSINT
*
*   OPEN INTERMEDIATE FILE WITH A REWIND.
*
*   ENTRY  OPNINT
*   SAVE
OPNINT TSX    S.OPEN,4
*   PTH    INTERM           REWIND,BINARY,OUTPUT
*   RETURN OPNINT
*
*   BSS    3
*   END
```

```
$ENTRY PRSORT
SOUTHERN CALIFORNIA
1
200
$IBSYS
```

```
$CLOSE S.SUC0,REWIND
$CLOSE S.SUC9,REPCVE
$IBSRT
FILE, INP/1, MOD/B, BLC/1950, REW
FILE, OUT, MOD/B, BLC/1950, REW
REC, LEN/(3), FIELD/(36RS, 72RS)
SORT, FIL/1, SEC/S, ORC/2, FIELD/(1A)
SYS, INP/S.SU00, MER/(C, B), OUT/S.SU08, DISK/145
OPT, NOCK
END
$IBSYS
$CLOSE S.SCK1,REWIND
$CLOSE S.SU08,REWIND
```

```

$IEJCR MARINR MAP
$FILE MARINR 'INTERM',UC8,*,TYPFI,REEL,
$ETC MARINR BLOCK=1950,LRL=3,RCI=650,
$ETC MARINR ERR=RERRX.,EGF=RECFX.,ECR=RECPX.
$IBFTC MARINR
C JOB NO. 5754 - MARINER IV COLOR PHOTOS
C
C READ THE SORTED PHOTO TAPE AND WRITE AN SC-4020 TAPE.
C
C INTEGER EOFRET, SHADE, OLDSHD, CELLNC, FRAMNC
C INTEGER BLSHDS(64, 2)
C DIMENSION TITLE(4)
C EXTERNAL TABLIV
C
C CLOSE, REWIND AND OPEN THE INTERMEDIATE FILE (OUTPUT FROM SORT).
C
C CALL CLSINT
C CALL OPNINT
C
C NECESSARY INITIALIZATION FOR SC-4020
C
C CALL CAMRAV(935)
C CALL CHSTZV(8, 8)
C CALL RITSTV(48, 66, TABLIV)
C CALL BRITV
C
C WRITE A 20-FRAME LEADER.
C
C DO 4 I = 1, 20
C CALL FRAMEV
4 CONTINUE
C
C SET UP END-OF-FILE CONTROL TO TRANSFER TO STATEMENT 9000 WHEN
C END-OF-FILE IS REACHED ON FILE 'INTERM'. ('C' IS A DUMMY
C ARGUMENT.)
C
C ASSIGN 9000 TO EOFRET
C CALL EOFCTL(0, EOFRET)
C
C RETRIEVE TITLE AND FRAME NUMBER INFORMATION FROM THE INTERMEDIATE
C FILE AND PRINT IT AS A CHECK.
C
C CALL GETREC(JUNK, TITLE(1), TITLE(2))
C CALL GETREC(JUNK, TITLE(3), TITLE(4))
C CALL GETREC(JUNK, FRAMNC, JUNK)
C
C PRINT 1000, TITLE, FRAMNC
C
C GET FIRST RECORD FROM INTERMEDIATE FILE.
C
C CALL GETREC(SHADE, LINFNC, CELLNC)
C NREC = 1
C
C NBLANK = 0
C
C TEST TO SEE IF FIRST SHADE IS =0. IF NOT, MAKE APPROPRIATE
C ENTRIES IN ARRAY 'BLSHDS'.
C
C IFISHADE .EQ. CIG0 TO 5
C
```

```

NBLANK = NBLANK + 1
BLSHDS(NBLANK, 1) = 0
BLSHDS(NBLANK, 2) = SHADE - 1
C
5      CONTINUE
C
C      ADVANCE THE FILM AND PRINT A TITLE, FRAME NUMBER, SHADE NUMBER,
C      AND BORDER.
C
C      CALL FRAME(TITLE, FRAMNO, SHADE)
C
10     CONTINUE
C
C      PRINT THE CELL JUST READ ON THE SC-4020 FRAME, THEN READ IN A NEW
C      RECORD. CONTINUE IN THIS FASHION UNTIL A NEW SHADE IS ENCOUNTERED
C
C      CALL PRCCELL(LINENC, CELLNO)
C
C      OLDSHD = SHADE
C      CALL GETREC(SHADE, LINENC, CELLNO)
C      NREC = NREC + 1
C
C      IF(SHADE .EQ. OLDSHD) GO TO 10
C
C      TEST FOR A GAP IN THE SHADES USED. IF THERE IS A GAP, MAKE AN
C      APPROPRIATE ENTRY IN 'BLSHDS'.
C
C      IF(SHADE .EQ. OLDSHD+1) GO TO 5
C
C      NBLANK = NBLANK + 1
C      BLSHDS(NBLANK, 1) = OLDSHD + 1
C      BLSHDS(NBLANK, 2) = SHADE - 1
C
C      GO TO 5
C
C      RETURN HERE WHEN END-OF-FILE IS ENCOUNTERED BY 'GETREC'.
C
9000   CONTINUE
C
C      PRINT THE TOTAL NUMBER OF RECCRDS READ.
C      NREC SHOULD TOTAL 40,000.
C
C      PRINT 4000, NREC
C
C      TEST TO SEE IS LAST POSSIBLE SHADE WAS USED. IF NOT, MAKE AN
C      ENTRY IN 'BLSHDS'.
C
C      IF (OLDSHD .EQ. 63) GO TO 9010
C
C      NBLANK = NBLANK + 1
C      BLSHDS(NBLANK, 1) = OLDSHD + 1
C      BLSHDS(NBLANK, 2) = 63
C
9010   CONTINUE
C
C      WRITE A 20-FRAME TRAILER.
C
C      00 9014 I = 1, 20
C      CALL FRAMEV

```

```
9C14      CONTINUE
C
C      WRITE A MESSAGE INDICATING WHICH SHADES WERE NOT USED.
C
C          CALL MESSGE(TITLE, FRAMNO, NPLANK, BLSHCS)
C
C      CLOSE AND REWIND THE INTERMEDIATE FILE.
C
C          CALL CLSINT
C
C      CLOSE AND WRITE OUT THE STANDARD OUTPUT BUFFER. THIS ENSURES THAT
C      ALL INFORMATION ON THE STANDARD OUTPUT FILE APPEARS BEFORE THE
C      SC-402C SIMULATION, WHICH DOES NOT USE A STANDARD FILE.
C
C          CALL CLEAN
C
C      A SPECIAL 'EXIT' ROUTINE CAN BE PROVIDED TO CALL THE SC-402C
C      SIMULATOR.
C
C          CALL EXIT
C
C      FORMATS FOR 'ECHO CHECK'.
C
C      1CCG FORMAT(1H1, 4A6, 7H FRAME I4)
C      4CCG FORMAT(7H NREC= I13)
C      END
```

```
$IBFTC FRAME
C      4X4 CELLS - BRIGHT MODE
C
C      ADVANCE THE FILM TO A NEW FRAME AND PRINT BORDER AND TITLE
C      INFORMATION ON IT.
C
C      SUBROUTINE FRAME(TITLE, FRAMNO, SHADE)
C      DIMENSION TITLE(14)
C      DIMENSION ALPHA(4)
C      INTEGER FRAMNO, SHADE
C
C      ADVANCE FILM
C
C          CALL FRAMEV
C
C      PRINT BORDER.
C
C          CALL LINEV(913, 025, 913, 826)
C          CALL LINEV(112, 025, 112, 826)
C          CALL LINEV(112, 025, 913, 025)
C          CALL LINEV(112, 826, 913, 826)
C
C      PRINT TITLE.
C
C          CALL RITE2V(24, 957, 1023, 90, 1, 21, +1, TITLE, NLST)
C
C      CONVERT FRAME AND SHADE NUMBER TO BCD USING INTERNAL FILE 99.
C
C          CALL BCDCON(ALPHA)
C          WRITE(99, 2000) FRAMNO, SHADE
C
C      PRINT FRAME AND SHADE NUMBER.
C
C          CALL RITE2V(24, 891, 1023, 90, 1, 19, +1, ALPHA, NLST)
C
C      RETURN
C
C      FORMAT FOR FRAME AND SHADE NUMBER.
C
C      2000 FORMAT( 5HFRAME, I3, 8H, SHADE, I3)
C      END
```

```
$IBFTC PRCCELL
C PRINT A 4-DOT CELL AT THE APPROPRIATE LINE NUMBER AND CELL
C (COLUMN) NUMBER. THIS ROUTINE DIVIDES THE PICTO AREA INTO 200
C LINES AND 200 COLUMNS.
C
C SUBROUTINE PRCCELL(LINENO, CELLNC)
C INTEGER CCELLNO
C
C IX = 109 + 4*CELLNC
C IY = 826 - 4*LINENO
C
C DO 100 I = 1, 2
C DO 10 J = 1, 2
C
C '42' IS THE CODE FOR THE CHARACTERON PLOTTING OCT.
C
C CALL PLOTV(IX+J, IY+I, 42)
C
C 10 CONTINUE
C 100 CONTINUE
C
C RETURN
C
C END
```

```
$IBFTC MESSGE
C PRINT A MESSAGE LISTING THE SHADES WHICH DO NOT APPEAR IN THE
C PICTURE.
C
C SUBROUTINE MESSGE(TITLE, FRAMNC, NBLANK, BLSHDS)
C INTEGER FRAMNC, BS1, BS2, BLSHDS(64, 2)
C DIMENSION TITLE(4)
C
C PRINT 1000, TITLE
C PRINT 1001, FRAMNC
C
C IF(NBLANK .NE. C) GO TO 10
C
C PRINT 1004
C RETURN
C
C 10 CONTINUE
C
C DO 100 I = 1, NBLANK
C
C BS1 = BLSHDS(I, 1)
C BS2 = BLSHDS(I, 2)
C
C IF(BS1 .EQ. BS2) PRINT 1002, BS1
C IF (BS1 .NE. BS2) PRINT 1003, BS1, BS2
C
C 100 CONTINUE
C
C RETURN
C
C 1000 FORMAT(1H1, 4A6)
C 1001 FORMAT(44H0THE FOLLOWING SHADES DO NOT APPEAR IN FRAME I4/)
C 1002 FORMAT (I4)
C 1003 FORMAT(I4, 3H -, I4)
C 1004 FORMAT(46H0ALL SHADES FROM 0 TO 63 APPEAR ON THIS FRAME.)
C
C END
```

```
$I$MAP CLEAN
* CLOSE AND UNBUFFER THE STANDARD OUTPUT FILE.
*
ENTRY CLEAN
CLEAN TRA **
      SXA XR4,4
      TSX S,CLSE,4
      MON S,FBOU
XR4   AXT **,4
      TRA* CLEAN
      END
```

```
$IBFTC SCEXIT
C SPECIAL 'EXIT' ROUTINE CALLS THE SC-4020 SIMULATOR BEFORE
C RETURNING TO $IBSYS.
C
SUBROUTINE EXIT
      CALL SCSIM
      STOP
END
```

```
$I$MAP INPINT
* INPUT ROUTINES FOR FILE 'INTERM' - INTERMEDIATE FILE WHICH HAS
* BEEN PROCESSED BY SORT.
*
EXTERN INTERM
PMC
*
* GET A 3-WORD RECORD FROM FILE 'INTERM'.
*
ENTRY GETREC
GETREC SAVE
*
* *SAVE* MACRO SETS XR4 TO COMPLEMENT OF CALLING ADDRESS.
* XR4 IS RESTORED TO THIS VALUE BY 'GXR4' AFTER TSX TO S,GETL
*
      SXA GXR4,4
      TSX S,GETL,4
      PZE INTERM,,BUFFR
GXR4  AXT **,4
      CLA BUFFR
      STO* 3,4 FIRST ARGUMENT
      CLA BUFFR+1
      STO* 4,4 SECOND ARGUMENT
      CLA BUFFR+2
      STO* 5,4 THIRD ARGUMENT
      RETURN GETREC
      PMC
*
* CLOSE INTERMEDIATE FILE WITH A REWIND.
*
ENTRY CLSINT
CLSINT SAVE
      TSX S,CLSE,4
      PZE INTERM REWIND,NOUNLOAD,END-OF-DATA
      RETURN CLSINT
*
* OPEN INTERMEDIATE FILE WITH A REWIND.
*
ENTRY OPNINT
OPNINT SAVE
      TSX S,OPEN,4
      PTW INTERM REWIND,BINARY,INPUT
      RETURN OPNINT
*
BUFFR BSS 3
      ENC
```

```
$IPMAP INTUTV
*
* SPECIAT 'UTVAR.' DECK TO BE USED WITH W061 ('EDFCTL'). IT
* RETURNS THE ADDRESS OF FILE 'INTERM', REGARDLESS OF THE ARGUMENT
* SUPPLIED IT.
*
*   EXTERN  INTERM
*
*   ENTRY   UTVAR.
UTVAR.  NULL
        CLA   POINTR
        STD   2,4
        TRA   1,4
*
POINTR  PZE   FILINT
FILINT  PZE   INTERM
        END
```

```
$ENTRY      MARINR
$IBSYS
$CLOSE      S.SU08,REMOVE
$IBSYS      ENDJOB      TOTAL NUMBER OF CARDS IN YOUR INPUT DECK
```

R71-525  
21  
1967/1/1

REFERENCES

1. Leighton, R. B., "The Photographs from Mariner IV," Sci. Am., 214, April 1966, 54-68.
2. Le Grand, Y., Light, Colour, and Vision, Chapman and Hall, Ltd., London, 1957.
3. MacAdam, D. L., "Visual Sensitivities to Color Differences in Daylight," J. Opt. Soc. Am., 32, 1942, 247-274.
4. Adams, R., and H. L. Jaffe, "A New Organ Scan Display in Polaroid Color" (Abstract), J. Nuclear Medicine, 5, No. 5, 1964, 346-347.