

SCIENCE RESEARCH COUNCIL

ATLAS COMPUTER LABORATORY

S O L

by

Paul Bryant

NOVEMBER 1966

ACKNOWLEDGEMENTS

The author wishes to thank the Atlas Computer Laboratory staff for their help and advice during the implementation of this compiler. Also grateful thanks are due to J. McNeley for kind permission to reproduce his original papers on SOL, and to the Institute of Electrical and Electronics Engineers in whose transactions these papers first appeared.

SOL

Foreword

This is a provisional manual. Dr. Bryant has written a compiler for the simulation language SOL and this language is now available to any user of the Atlas Laboratory. We believe that the compiler is free from, at any rate serious, errors and we would not have undertaken this task if we did not believe that the language is powerful and flexible and provides a unified method for attacking complicated problems of the "operational research" type. But we need practical experience and have therefore decided to put it on field trial as quickly as possible. Dr. Bryant will be glad to help anyone who has difficulty in interpreting these notes or in using the compiler, and will be glad also to know of errors and to receive suggestions for changes or additions and for the form and content of a final version of the manual.

J. Howlett
Director
Atlas Computer Laboratory

15th December 1966

CONTENTS

Chapter I	Introduction	Page 1
II	SOL - A Symbolic Language for General-Purpose Systems Simulation	2
III	A Formal Definition of SOL	10
IV	Differences in Atlas SOL	16
V	Compile time diagnostics	18
VI	Run time diagnostics	19
VII	Limitations	20
VIII	Sample program output	21

CHAPTER I

Introduction

The simulation of complex systems on digital computers is a powerful tool in the design of such systems. Examples of the types of problems amenable to this form of solution are the flow of traffic through a road network, the flow of material through a factory, or the most economical way of deploying a fleet of ships. Simulation models have the advantage over the live system that the parameters associated with a given system may be varied at will, cheaply and easily and the resulting effects can be computed and the inferences drawn without the vast cost of making the changes to the actual system.

The earliest simulation problems were tackled with hand coded programs and were 'one off jobs' tailored to a particular need but with the development of large and powerful computers the essentials of simulation problems were extracted and put into the framework of compilers which were then capable of tackling large problem areas.

One such compiler is SOL (Simulation Orientated Language) designed by D. E. Knuth and J. L. McNeley. The author first met this language at Carnegie Institute of Technology where it was being used extensively for the simulation of multi-access computing systems. There is no better introduction to the language than the original papers which are reproduced in Chapters II and III. Chapter II gives an easy introduction to SOL by way of a fairly complicated example and the reader is advised to fully understand this Chapter before proceeding. Chapter III gives a formal definition of the language; the Atlas implementation has adhered to this as far as possible. This Chapter may be omitted at a first reading. Chapter IV gives the exact differences between SOL as defined in Chapter III and Atlas SOL. These differences have been demanded by the card character set on Atlas and the limitations of the Atlas Compiler language by means of which Atlas SOL has been implemented. Chapter VIII gives a listing of the Sample problem of Knuth and McNeley in Atlas SOL followed by the output from the actual running on Atlas of the problem. The results differ from those of Knuth and McNeley only because a different random number generator was used.

SOL—A Symbolic Language for General-Purpose Systems Simulation

D. E. KNUTH AND J. L. McNELEY

Summary—This paper illustrates the use of SOL, a general-purpose algorithmic language useful for describing and simulating complex systems. Such a system is described as a number of individual processes which simultaneously enact a program very much like a computer program. (Some features of the SOL language are directly applicable to programming languages for parallel computers, as well as for simulation.) Once a system has been described in the language, the program can be translated by the SOL compiler into an interpretive code, and the execution of this code produces statistical information about the model. A detailed example of a SOL model for a multiple on-line console system is exhibited, indicating the notational simplicity and intuitive nature of the language.

SIMULATION by computer is one of the most important tools available to scientists and engineers who are studying complex systems. The first computer programs of this type were especially designed to simulate some particular model; but afterwards the authors of several of these programs abstracted the essential features of their program organization and prepared *general-purpose* simulation programs. The most extensively used general-purpose programs of this type have apparently been the SIMSCRIPT compiler of Markowitz, Hauser, and Karr [1], and the GPSS (General-Purpose Systems Simulator) routines of Gordon [2]–[4].

Although SIMSCRIPT and GPSS are both general-purpose simulation programs, they are built around quite different concepts because of their independent evolution, and so they bear little resemblance to each other. SOL (Simulation-Oriented Language) is another general-purpose simulation routine, in which we have attempted to incorporate the best features of the other languages. After a careful study of SIMSCRIPT and GPSS, and after having implemented a version of GPSS for another computer, we found that it would be possible to generalize the characteristics of the former programs, while at the same time the language became simpler and more convenient for the preparation of models. This simplification was achieved by extracting the essential characteristics of GPSS and recasting them into a symbolic language such as SIMSCRIPT. There are, of course, a great many ways in which this can be done, and we are not sure that the compromises we have chosen have been optimal; but a year of experience with the SOL language, after applying it to a number of problems of different kinds, indicates that SOL is a

quite powerful and flexible way to describe systems for simulation. We also found that the increased generality available in SOL was actually simpler to implement into a computer program than the previous routines were.

A complex system can be represented as a number of individual processes, each of which follows a *program* very much like a computer program. For example, if we were simulating traffic in a network of streets, we might have one program describing a typical automobile (or perhaps two programs, one which describes all of the women drivers and one which describes all of the men), another program which represents the action of traffic signals, and possibly some other programs representing pedestrians, etc. Each program depends not only on quantities which are specified in advance, but also on *random* quantities which describe a probabilistic behavior; thus, we can specify the probability that a driver will turn left, the probability that he will switch lanes, the distribution of speeds, etc. Although each program represents only a single entity (such as a single automobile), there can be many entities each carrying out the same program, each at its own place in the program.

Because of these considerations, SOL is a language which is in many respects very much like a problem-oriented language such as ALGOL or FORTRAN. There are three major points of difference between SOL and conventional compiler languages. SOL provides

- 1) mechanisms for parallel computation,
- 2) a convenient notation for random elements within arithmetic expressions,
- 3) automatic means of gathering statistics about the elements involved.

On the other hand, many of the features of problem-oriented languages do not appear in SOL, not because they are incompatible with it, but rather because they introduce more complication into this scheme than seems to be of practical value for simulation processes.

A program written in the SOL language is punched onto cards and it is then compiled by the SOL *compiler* into an interpretive pseudocode. The SOL *interpreter* is another machine program, which executes this pseudocode and produces the results. (The SOL system has been implemented for the B5000 computer, but at the present time it is being used only for research within the Burroughs Corporation, and it is not currently available for distribution.)

A self-contained, complete description of SOL ap-

Manuscript received January 3, 1964.
D. E. Knuth is with the California Institute of Technology, Pasadena, Calif.
J. L. McNeley is with the Burroughs Corporation, Pasadena, Calif.

pears in another paper [5]. The definition there is rather terse since it is intended primarily as a reference description; we will introduce the language here by means of an example, discussing the significance of each statement in an intuitive fashion.

EXAMPLE: COMMUNICATION WITH REMOTE TERMINALS

The following example has been chosen not only to illustrate most of the features of SOL, but also because it is a practical application in which SOL has been used to evaluate the design of an actual system of some complexity.

Consider the configuration shown in Fig. 1. This represents one of four similar groups of devices which all share the processor shown at the right. The "TU's" are terminal units which may be thought of as inquiry stations or typewriters. There are three groups of typewriters, with three in the first group (TU[1], TU[3], TU[5]), two in the second group (TU[2], TU[4]) and only one in the third (TU[6]). These groups are located many miles from each other and from the central processor. People come in at the rate of about five or six per minute to use each typewriter, and they wait in the appropriate queue until the typewriter is free.

These people will send one of three kinds of messages.

Message	Frequency	Compute time	Number of Response Words
A	20 per cent	250 msec	3
B	50 per cent	300 msec	4
C	30 per cent	400 msec	5

Each message type has a different frequency and requires a different amount of central processor time.

Communication between the typewriters and the processor is handled by *site buffers* SB[1], SB[2], SB[3], one at each remote site, and by two *processor buffers* PBU's, which receive the information and transmit it to the computer. These processor buffers sequentially scan TU[1], TU[2], ..., TU[6], TU[1], ... until locating a typewriter ready to transmit information; this scanning is done by sending control pulses to all lines, then receiving a "positive" response from the SB if the appropriate TU is ready. Then a message is transferred from SB to the PBU and from there to the processor; after computing the answer, the processor refills the PBU, and the appropriate number of words is sent back to the SB and is typed on the TU (one word at a time). Further details will be given as we discuss the program.

We will compose three programs.

- 1) A program which describes the action of each person who uses the remote typewriters.
- 2) A program which describes the action of each of the two PBU's.
- 3) A program which simulates the action of the other

six PBU's, which share the central processor with the configuration shown in Fig. 1.

Fig. 2 shows these three programs together with the control information, as a complete SOL model.

The independent quantities which enact the programs as the simulation proceeds are called *transactions*. (Much of the terminology used in SOL is taken from Gordon's simulator [2]-[4].) As simulation begins, there are only three transactions: one for each of the programs 1), 2), 3). Therefore, these programs describe not only the action of the quantities mentioned above, they also describe the creation and dissolution of new transactions.

Each transaction contains *local variables* which have values that can be referred to only by that transaction. There are also *global variables*, and some other types of global quantities, which can be referred to by all transactions. Thus, transactions can interact with each other by setting and testing global quantities. Only one "copy" of each global variable is present in the system, but there are in general many copies of each local variable (one for each transaction).

Program 1), which represents the people using the typewriters, might begin as follows:

```
process USERS;
begin integer Q, START TIME, MESSAGE TYPE;
new transaction to START; new transaction to START;
ORIGIN: new transaction to START; wait 0:5000; go to
ORIGIN;
START:
```

The first line merely identifies a *process* (i.e., a program) with the name "USERS." The language resembles ALGOL, and we distinguish control words by putting them in bold-face type. The second line states that there are three local variables in these transactions, having the names Q, START TIME and MESSAGE TYPE. The statement "new transaction to START" describes the creation of a new transaction whose local variables have the same values as the local variables of the parent transaction (in this case zero, since all local variables are automatically set to zero at the beginning of a process), and this new transaction begins executing the program at the statement labeled START. The statement "wait 0:5000" means an amount of simulated time, chosen randomly from 0 to 5000, is to elapse before the next statement is executed. In general, the statement "wait E," where E is some expression, means that E units of time are to pass before executing the next statement. The expression $E_1:E_2$ always denotes a random integer chosen between E_1 and E_2 , and therefore "wait 0:5000" has the meaning stated above. A unit of time in this case represents 1 msec in the simulated model.

The reader should now reread the above sequence of coding before proceeding further. The essential action it describes is that three transactions will begin executing the program beginning at the statement called START, and thereafter a new transaction (i.e., a new user enter-

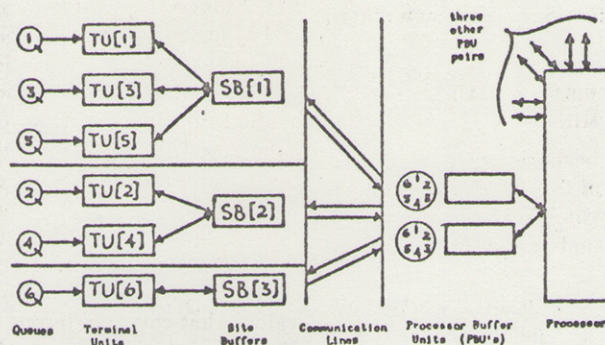


Fig. 1—Multiple console on-line communication system.

```

begin
facility TU[6], SB[3], LINE, COMPUTER;
store 10 QUEUE[6];
integer TUSTATE[6], SBNUMBER[6], TUMESSAGE[6];
table (2000 step 500 until 15000) TABLE[6];
process MASTER CONTROL;
begin SBNUMBER[1]←1; SBNUMBER[2]←2;
      SBNUMBER[3]←1; SBNUMBER[4]←2;
      SBNUMBER[5]←1; SBNUMBER[6]←3;
wait 60×60×1000; stop end;
process USERS;
begin integer Q, START TIME, MESSAGE TYPE;
new transaction to START; new transaction to START;
ORIGIN: new transaction to START; wait 0:5000; go to
ORIGIN;
START: Q←1:6; enter QUEUE[Q];
MESSAGE TYPE←(1,1,2,2,2,2,3,3,3);
seize TU[Q];
TUMESSAGE[Q]←MESSAGE TYPE;
wait 6000:8000;
START TIME←time;
output #TU#, Q, #SENDS MESSAGE#, MESSAGE TYPE,
      #AT TIME#, time;
TUSTATE[Q]←1;
wait until TUSTATE[Q]=0;
release TU[Q]; leave QUEUE[Q];
tabulate (time-START TIME) in TABLE[Q];
output #TU#, Q, #RECEIVES REPLY AT TIME#, time;
cancel end;
process PBU; begin integer s, T, WORDS;
new transaction to SCAN; T←3;
SCAN: T←T+1; if T>6 then T←1; wait 1;
s←SBNUMBER[T];

```

```

seize LINE;
wait 5; if SB[s] busy then (wait 80; release LINE; go to
SCAN);
seize SB[s]; wait 15; if TUSTATE[T]≠1 then
(wait 65; release LINE; release SB[s]; go to SCAN);
wait 225; SEND: wait 170; if pr(0.02) then (wait 20; go to
SEND);
new transaction to COMPUTATION; wait 20; release SB[s];
release LINE; TUSTATE[T]←2; cancel;
COMPUTATION: seize COMPUTER; WORDS←TUMESSAGE[T]
+2;
wait (if WORDS=3 then 250 else if WORDS=4 then 300
else 400);
release COMPUTER;
OUTPUT: wait 1; seize LINE; wait 5;
if SB[s] busy then (wait 80; release LINE; go to OUTPUT);
seize SB[s]; wait 75;
RECEIVE: wait 80; if pr(0.01) then (wait 20; go to
RECEIVE);
release LINE;
WORDS←WORDS-1;
if WORDS=0 then new transaction to SCAN;
wait 325; release SB[s]; wait 170;
if WORDS>0 then go to OUTPUT;
TUSTATE[T]←0; cancel end;
process OTHER PBUS;
begin integer i; i←6;
CREATE: new transaction to COMPUTE;
i←i-1; if i>0 then go to CREATE; cancel;
COMPUTE: wait 3200:5000; seize COMPUTER;
wait (250, 250, 300, 300, 300, 300, 300, 400, 400, 400);
release COMPUTER; go to COMPUTE end;
end.

```

Fig. 2—Complete SOL program for the on-line system.

ing the system) will be created at intervals of about 2.5 sec. We have started the system with three transactions so that it will not take it very long to arrive at a more or less stable condition.

The program now proceeds as follows:

START: $Q \leftarrow 1:6$; enter QUEUE[Q];

The statement " $Q \leftarrow 1:6$ " means that local variable Q is set to a random number between 1 and 6; thus the user is assigned to one of the six typewriters. The "enter" statement refers to one of six global quantities, QUEUE[1], ..., QUEUE[6]. At the conclusion of the simulation, data will be reported giving the average number of people in each queue at a given time, and also the maximum number.

MESSAGE TYPE $\leftarrow (1,1,2,2,2,2,3,3,3)$;

The expression (E_1, E_2, \dots, E_n) denotes a random choice selected from among the n expressions. Therefore, the given statement means that the local variable MESSAGE TYPE receives the value 1 with probability 20 per cent, 2 with probability 50 per cent and 3 with probability 30 per cent; this represents the choice of message A, B or C as stated earlier.

seize TU[Q];

This statement refers to one of the global quantities TU[1], ..., TU[6], which are classified as facilities. A facility is seized by one transaction, and then it cannot be seized by another transaction until it has been released by the former transaction. Therefore, if transaction X comes to a seize statement, where the corresponding facility is busy (i.e., has been seized by transaction Y), transaction X stops executing its program until transaction Y releases the facility. If several transactions are waiting for this event, they are processed in a first-come-first-served fashion.

Thus, the statement "seize TU[Q]" expresses the situation that the user takes control of typewriter number Q , after possibly waiting in line for it to become available.

TUMESSAGE[Q] \leftarrow MESSAGE TYPE;

This statement says that the global variable TUMESSAGE[Q] is set to indicate the type of message. This global variable is used to communicate with the PBU process which is described below.

wait 6000:8000;

This statement simulates the time of 6 to 8 sec, taken by the man to type his request on the terminal unit.

START TIME \leftarrow time;

We now set the local variable START TIME equal to "time," the current value of the simulated clock.

output #TU#, Q, #SENDS MESSAGE#, MESSAGE TYPE,
#AT TIME#, time;

This statement causes the printing of a line during the simulation, having the form "TU 3 SENDS MESSAGE 2 AT TIME 12610." The "#" symbols indicate a string inserted into the output.

TUSTATE[Q] \leftarrow 1;

Another global variable TUSTATE[Q] is now set to 1 to indicate that the typed message is ready to send. TUSTATE[Q] has three possible settings.

TUSTATE = 0 means the TU is free.

TUSTATE = 1 means the message has been typed.

TUSTATE = 2 means the answer message may be typed.

The next statement

wait until TUSTATE[Q] = 0;

means the transaction is to stop at this point until TUSTATE[Q] has been set to zero (by some other transaction). This indicates that we are to wait until the answer message has been fully received. When that occurs, the transaction finishes its work as follows:

release TU[Q]; leave QUEUE[Q];

tabulate (time - START TIME) in TABLE[Q];

The latter statement is used for statistical data; TABLE[Q] is a global quantity which receives "readings" by means of "tabulate" statements. At the end of simulation, this table is printed out giving the mean, the standard deviation and a histogram of the data has received.

output #TU#, Q, #RECEIVES REPLY AT TIME#, time;
cancel end;

The last statement, "cancel," causes the disappearance of the transaction, and the word "end" indicates the end of the program for this process.

Program 2), which runs simultaneously with 1) and 3), describes the action of the PBU's.

process PBU; begin integer s, T, WORDS;
new transaction to SCAN; T \leftarrow 3;
SCAN:

We have three local variables, s, T and WORDS. At the beginning, two transactions (representing the two PBU's) start at SCAN, one with its variable T = 0, the other with T = 3.

SCAN: T \leftarrow T + 1; if T > 6 then T \leftarrow 1; wait 1;

These statements represent the cyclic scanning process which we assume takes 1 msec. The variable T represents the number of the TU which the PBU will be referencing.

S \leftarrow SBNUMBER[T];

"SBNUMBER" is a table of constants, which is used to tell which SB corresponds to the TU scanned.

seize LINE;

We now seize the facility LINE, which represents the long-distance communication lines. (If the other PBU has seized LINE already, we must wait until it has been released.)

```
wait 5; if sb[s] busy then
    (wait 80; release LINE; go to SCAN);
```

We wait 5 msec for a control signal to propagate to the SB unit. Here sb[s] is a facility; if it is busy (i.e., has been seized by the other PBU) we wait 80 msec more, receiving no signal back, so we release the line and return to scan the next TU.

```
seize sb[s]; wait 15; if TUSTATE[T] ≠ 1 then
    (wait 65; release LINE; release sb[s]; go to SCAN);
```

If sb[s] received the control signal, it is brought under the control of this PBU. Fifteen milliseconds later, the number T has been transmitted across the line, and it takes 65 msec for the SB to determine if TU[T] is ready to transmit or not. If not, we release the SB and the line, and scan again.

```
wait 225; SEND: wait 170; if pr(0.02) then
    (wait 20; go to SEND);
```

It takes 225 msec for the SB to get ready to transmit the message and to send a warning signal across the line to the PBU. Then 170 msec are required to send the input message. The construction "if pr(0.02)" means "2 per cent of the time," and so this statement indicates that, with probability 0.02, a parity error in the transmission is detected; in such a case, we send back a signal calling for retransmission of the message.

```
new transaction to COMPUTATION; wait 20; release sb[s];
release LINE; TUSTATE[T] ← 2; cancel;
```

At this point two parallel processes take place. As the PBU tries to send the message to the computer, it also sends a "message received" signal across the lines to the SB, and, 20 msec later, the SB and the lines are released. The TUSTATE is adjusted, and then this portion of the transaction is cancelled.

```
COMPUTATION: seize COMPUTER;
WORDS ← TUMESSAGE[T] + 2;
wait (if WORDS = 3 then 250 else
    if WORDS
        = 4 then 300 else 400);
release COMPUTER;
```

Here we send the message to the computer facility, possibly waiting for it to become available. The local variable WORDS is set to the number of words output for the current message, and we also wait the appropriate amount of computer time. At this point, the output message has been created by the computer, and it has been sent back to the PBU. The final job is to output this message, one word at a time:

```
OUTPUT: wait 1; seize LINE; wait 5;
if sb[s] busy then (wait 80; release LINE; go to OUTPUT);
```

A control word is sent out to interrogate the SB, as in the case of input above.

```
seize sb[s]; wait 75;
RECEIVE: wait 80; if pr(0.01) then
    (wait 20; go to RECEIVE);
release LINE;
```

We have output one word to the SB; there was probability 1 per cent that a transmission error was detected.

```
WORDS ← WORDS - 1;
if WORDS = 0 then new transaction to SCAN;
wait 325; release sb[s]; wait 170;
```

After the last word has been transmitted, a parallel activity starts with another scan. It takes 325 msec for the SB to send the word to the typewriter, and another 170 msec are required for the typewriter to finish its typing.

```
if WORDS > 0 then go to OUTPUT;
TUSTATE[T] ← 0; cancel end;
```

When the output has all been typed, TUSTATE is reset to zero (thus activating the USER transaction) and this parallel branch of the program disappears.

Program 3) is used to describe the traffic which takes place at the computer, by creating six simulated PBU's as follows:

```
process OTHER PBUS;
begin integer I; I ← 6;
CREATE: new transaction to COMPUTE;
I ← I - 1; if I > 0 then go to CREATE; cancel;
COMPUTE: wait 3200:5000; seize COMPUTER;
wait (250,250,300,300,300,300,300,400,400,400);
release COMPUTER; go to COMPUTE end;
```

Our example program is now almost complete. We precede the three processes given above by the following code, which declares the global quantities. There is also a fourth process which accomplishes the initialization and which stops the simulation after 1 hour of simulated time.

```
facility TU[6], SB[3], LINE, COMPUTER;
store 10.QUEUE[6];
integer TUSTATE[6], SBNUMBER[6], TUMESSAGE[6];
table (2000 step 500 until 15000) TABLE [6];
process MASTER CONTROL;
begin SBNUMBER[1] ← 1; SBNUMBER[2] ← 2;
    SBNUMBER[3] ← 1; SBNUMBER[4] ← 2;
    SBNUMBER[5] ← 1; SBNUMBER[6] ← 3;
wait 60 × 60 × 1000; stop end;
```

REMARKS

We have purposely chosen a rather complex example to show how SOL can be used to solve an actual problem of practical importance, and to show in what a natural manner the system can be described in the language.

Fig. 3 is a sample of some of the output resulting from the program of the preceding section.

ORIGIN	SEND	RECEIVE	COUNT	LABEL	START	COMPUTATION	CREATE	FRACTION OF TIME IN USE	NAME OF FACILITY
TU	6	SENDS MESSAGE	1	AT TIME				0.8318	TU0001
TU	4	SENDS MESSAGE	1	AT TIME				0.8055	TU0002
TU	5	SENDS MESSAGE	2	AT TIME				0.7887	TU0003
	6	RECEIVES REPLY AT TIME						0.8085	TU0004
TU	4	RECEIVES REPLY AT TIME						0.8302	TU0005
TU	5	RECEIVES REPLY AT TIME						0.7585	TU0006
	6	SENDS MESSAGE	3	AT TIME				0.6051	SU0001
TU	2	SENDS MESSAGE	2	AT TIME				0.4221	SU0002
TU	5	SENDS MESSAGE	1	AT TIME				0.2120	SU0003
	6	RECEIVES REPLY AT TIME						0.8649	LINE
TU	3	SENDS MESSAGE	2	AT TIME				0.5509	COMPUTER
TU	1	SENDS MESSAGE							
TU	4	SENDS MESSAGE	1	AT TIME					
TU	5	SENDS MESSAGE	2	AT TIME					
	6	RECEIVES REPLY AT TIME							
TU	3	SENDS MESSAGE	3	AT TIME					
TU	2	SENDS MESSAGE	3	AT TIME					
	6	RECEIVES REPLY AT TIME							
TU	5	SENDS MESSAGE	2	AT TIME					
TU	2	SENDS MESSAGE	2	AT TIME					
	6	RECEIVES REPLY AT TIME							
TU	1	SENDS MESSAGE	1	AT TIME					
TU	4	SENDS MESSAGE	2	AT TIME					
TU	5	SENDS MESSAGE	2	AT TIME					
	6	RECEIVES REPLY AT TIME							
TU	3	SENDS MESSAGE	3	AT TIME					
TU	2	SENDS MESSAGE	3	AT TIME					
	6	RECEIVES REPLY AT TIME							
TU	5	SENDS MESSAGE	2	AT TIME					
TU	2	SENDS MESSAGE	2	AT TIME					
	6	RECEIVES REPLY AT TIME							
TU	1	SENDS MESSAGE	1	AT TIME					

NAME OF STORE	CAPACITY	MAXIMUM USED	AVERAGE OCCUPANCY	AVERAGE UTILIZATION
QUEUE[001]	10	10	2.5272	0.2527
QUEUE[002]	10	10	2.4255	0.2426
QUEUE[003]	10	10	2.3835	0.2384
QUEUE[004]	10	7	1.7696	0.1770
QUEUE[005]	10	8	2.1844	0.2184
QUEUE[006]	10	5	1.4971	0.1497

TABLE NAME IS TABLE[003]				
NUMBER OF TABLE ENTRIES	235	SUM OF ALL ENTRY VALUES		
MEAN OF TABLE	5110.9617	1441.51124		
UPPER LIMIT	NUMBER	PER CENT	CUMULATIVE	MULTIPLE OF MEAN
2000	0	0.00	0.00	0.3913
2500	0	0.00	0.00	0.4891
3000	5	2.13	2.13	0.5870
3500	14	5.96	8.09	0.6848
4000	36	15.32	23.40	0.7826
4500	32	13.62	37.02	0.8805
5000	46	19.57	56.60	0.9783
5500	23	9.79	66.38	1.0761
6000	25	10.64	77.02	1.1739
6500	18	7.66	84.66	1.2718
7000	12	5.11	89.79	1.3696
7500	10	4.26	94.04	1.4674
8000	5	2.13	96.17	1.5653
8500	1	0.43	96.60	1.6631
9000	4	1.70	98.30	1.7609
9500	1	0.43	98.72	1.8587
10000	1	0.43	99.15	1.9566
10500	1	0.43	99.57	2.0544
11000	0	0.00	99.57	2.1522
11500	1	0.43	100.00	2.2501
12000	0	0.00	100.00	2.3479
12500	0	0.00	100.00	2.4457
13000	0	0.00	100.00	2.5436
13500	0	0.00	100.00	2.6414
14000	0	0.00	100.00	2.7392
14500	0	0.00	100.00	2.8370
15000	0	0.00	100.00	2.9349

Fig. 3 (pp. 406-407)—Samples of the output obtained.

The ideas used in SOL for creating and canceling transactions have applications in the design of languages for highly parallel computers.

The techniques which are used in the implementation of SOL will be the subject of another paper. It should be indicated here, however, that the implementation gives a rather efficient program because separate lists are kept for transactions which are waiting for different reasons. Those which are waiting for time to pass are kept sorted on the required time. Those which are waiting for a condition such as "wait until $A=0$," for some global variable A , are kept in a list associated with A ; this list is interrogated only when the value of A has been changed.

The SOL system has proved to be especially advantageous for simulating computer systems since "typical

programs," which we assume are to be run on the simulated computers, are easily coded in SOL's language.

ACKNOWLEDGMENT

The authors wish to express their appreciation to J. Merner for many helpful suggestions.

REFERENCES

- [1] H. M. Markowitz, B. Hauser, and H. W. Kurr, "SIMSCRIPT—A Simulation Programming Language," Prentice-Hall, Inc., Englewood Cliffs, N. J.; 1963.
- [2] G. Gordon, "A general purpose systems simulation program," *Proc. Eastern Joint Computers Conf.*, pp. 87-104; December, 1961.
- [3] —, "A general purpose systems simulation program," *IBM Systems J.*, vol. 1, pp. 18-32; September, 1962.
- [4] "Reference Manual, General Purpose Systems Simulator II," IBM Corp., White Plains, N. Y.; 1963.
- [5] D. E. Knuth and J. L. McNeley, "A formal definition of SOL," this issue, page 409.
- [6] M. R. Lackner, "Toward a general simulation capability," *Proc. Spring Joint Computer Conference*, pp. 1-14; May, 1962.

A Formal Definition of SOL

D. E. KNUTH AND J. L. MCNELEY

Summary—This paper gives a formal definition of SOL, a general-purpose algorithmic language useful for describing and simulating complex systems. SOL is described using meta-linguistic formulas as used in the definition of ALGOL 60. The principal differences between SOL and problem-oriented languages such as ALGOL or FORTRAN is that SOL includes capabilities for expressing parallel computation, convenient notations for embedding random quantities within arithmetic expressions and automatic means for gathering statistics about the elements involved. SOL differs from other simulation languages such as SIMSCRIPT primarily in simplicity of use and in readability since it is capable of describing models without including computer-oriented characteristics.

I. GENERAL DESCRIPTION

SOL IS an algorithmic language used to construct models of general systems for simulation in a readable form. The model builder describes his model in terms of processes whose number and detail are completely arbitrary and definable within the constraints of the language elements. A SOL model consists of a number of statements and declarations which have a character similar to that found in programming languages such as ALGOL.

The model is not built to be executed in a sequential fashion as ordinary programming languages require. Rather, the processes are written and executed as if all were running in parallel. Control between processes is maintained by the interaction of *global* entities and by control and communication instructions within the different processes. At the initiation of the simulation all processes are begun simultaneously.

Variables declared within a process are called *local* variables. Within a given process it is possible to have several actions going on at once; therefore, we may think of several objects on which the action takes place each in its own place in the process at any given time. These objects will be referred to as *transactions*. A set of local variables corresponding in number to those declared in the process is "carried with" each transaction of that process. Transactions situated within one process may not refer to the local variables of another process nor to the local variables of another transaction in the same process.

Global quantities are of three major types: global variables, facilities and stores. *Global variables* can be referenced or changed by any transaction from any process in the system, and the variable possesses only one value at any given time.

A *facility* is a global element which can be controlled by only one transaction at a time. Associated with each request for the facility is a "control strength," and if a requesting transaction has a higher strength than the transaction controlling the facility, an interrupt will occur. Interrupts may be nested to any depth. If the requesting transaction is not of greater strength than the controlling transaction, then the requesting transaction stops and waits for the facility until the controlling transaction releases its control. When a transaction is interrupted, it cannot advance to any other position in its program until it regains control of the facility.

Stores are space-shared rather than time-shared global elements, and they are assigned a specific storage capacity. As long as there is sufficient storage to accommodate the requesting transaction the request for space is satisfied; otherwise, the transaction waits until the space it is requesting becomes available. In this sense, a facility may be regarded as a store which has a capacity of one unit only, except for the fact that no interrupt capability is provided for stores.

Simulated time passes in discrete units indicated in "wait statements." The model builder requires the transactions to wait a proper number of time units at the appropriate places in the processes, and this specifies the time element. The interpretation of the physical significance of a unit of time is immaterial in the SOL language; if all time interval specifications are multiplied by a factor of ten it will not decrease the speed by which the model is simulated.

Control within or between processes is also introduced into the simulation by allowing a transaction to wait until a global variable or expression obtains a certain value. A transaction may also be forced to wait until a space- or time-shared element attains a certain status.

Output statements which display the progress of the simulation may be inserted at will in the model. Special types of statistics are automatically available, such as the per cent of utilization of a facility, the average and maximum number of elements in a store at a given moment, etc. Another type of global quantity, called a *table*, is introduced to record statistical information about desired data. The mean, the standard deviation and a histogram are provided for all data recorded in a table.

Processes initiate parallelism within themselves by using a duplication operation. The transaction makes an exact copy of itself and sends the copy to a specified location in the process while the original continues in sequence. A transaction is taken out of the system when it executes a "cancel" statement.

Manuscript received January 3, 1964.

D. E. Knuth is with the California Institute of Technology, Pasadena, Calif.

J. L. McNeley is with the Burroughs Corporation, Pasadena, Calif.

Other operations available in SOL are similar to those of existing algorithmic languages, but these portions of the language are at the present time less powerful than the features available in a large scale programming language.

A detailed example of a complete SOL model appears in a companion paper in this issue [2].

II. SYNTAX AND SEMANTICS OF SOL

We will define the syntax of SOL using meta-linguistic formulas as given in the definition of ALGOL 60 [1]. Certain things which have been carefully defined in ALGOL 60 will not be redefined here but will merely be stated to have the same interpretation as given by ALGOL. We will use the abbreviation $\langle A \rangle$ to mean "a list of $\langle A \rangle$," i.e.,

$$\langle A \rangle ::= \langle A \rangle | \langle A \rangle^*, \langle A \rangle$$

Comments may be written in the form "comment (string without semicolons);" as in ALGOL 60.

A. Identifiers and Constants

$\langle \text{letter} \rangle ::= A | B | C | D | \dots | Z$
 $\langle \text{digit} \rangle ::= 0 | 1 | 2 | 3 | \dots | 9$
 $\langle \text{number} \rangle ::= \langle \text{constant} \rangle | \langle \text{decimal constant} \rangle$
 $\langle \text{constant} \rangle ::= * \langle \text{digit} \rangle^*$
 $\langle \text{decimal constant} \rangle ::= \langle \text{constant} \rangle . \langle \text{constant} \rangle$
 $\langle \text{identifier} \rangle ::= \langle \text{letter} \rangle | \langle \text{identifier} \rangle \langle \text{letter} \rangle | \langle \text{identifier} \rangle \langle \text{digit} \rangle$

Identifiers are used as the names of variables, statistical tables, stores, facilities, processes, procedures and statements. The same identifier can be used for only one purpose in a program. Constants are used to represent integer numbers. Decimal constants represent real numbers. Identifiers must be declared before they are used elsewhere.

B. Declarations

$\langle \text{declared item} \rangle ::= \langle \text{identifier} \rangle | \langle \text{identifier} \rangle [\langle \text{constant} \rangle]$
 $\langle \text{variable declaration} \rangle ::= \text{integer} * \langle \text{declared item} \rangle^* | \text{real} * \langle \text{declared item} \rangle^*$
 $\langle \text{facility declaration} \rangle ::= \text{facility} * \langle \text{declared item} \rangle^*$
 $\langle \text{store declaration} \rangle ::= \text{store} * \langle \text{constant} \rangle \langle \text{declared item} \rangle^*$
 $\langle \text{table declaration} \rangle ::= \text{table} * (\langle \text{number} \rangle \text{step} \langle \text{number} \rangle \text{until} \langle \text{number} \rangle) \langle \text{declared item} \rangle^*$
 $\langle \text{monitor declaration} \rangle ::= \text{monitor} * \langle \text{identifier} \rangle^*$

If the declared item is simply an identifier, it means that a single item of that name is being declared. The other form, e.g., $A[10]$, means 10 similar items called $A[1]$, $A[2]$, \dots , $A[10]$ are being declared.

The variable declaration is used to specify variables (either local or global, depending on where the declaration appears). All variables are initially set to zero when declared. "Integer" variables differ from "real" variables in that when a value is assigned to them it is rounded to the nearest integer.

When a facility is declared, it is initially "not busy"; at the end of the simulation run, statistics are reported giving the per cent of time each facility was in use.

A store declaration gives the capacity of each store (the number preceding the identifier). At the end of the simulation run statistics are given on the average and the maximum number of items occupying the store (as a function of time). Stores are empty when first declared.

A "table" is used to gather detailed statistical information of any desired type; readings are tabulated and afterwards the mean, the standard deviation, histogram distribution, etc., are output. The constants preceding the table name give the starting point for histogram intervals, the increment between intervals and the highest value.

A monitor declaration names items which already have been declared, with the understanding that these identifiers are to be "monitored." This means that whenever a change in the state of the corresponding quantity is detected, a line will be printed giving the details. This capability is especially useful when checking out a model, and it can also be used to advantage for output during a regular simulation run.

C. Expressions and Relations

$\langle \text{name} \rangle ::= \langle \text{identifier} \rangle | \langle \text{identifier} \rangle [\langle \text{expression} \rangle]$

By $\langle \text{variable name} \rangle$, $\langle \text{facility name} \rangle$, etc., we will mean that the identifier in the name has appeared in a $\langle \text{variable declaration} \rangle$, $\langle \text{facility declaration} \rangle$, etc., respectively.

$\langle \text{primary} \rangle ::= \langle \text{variable name} \rangle | \langle \text{store name} \rangle | \langle \text{constant} \rangle | \langle \text{decimal constant} \rangle | \text{time} | (* \langle \text{expression} \rangle^*) | \text{abs}(\langle \text{expression} \rangle) | \text{max}(* \langle \text{expression} \rangle^*) | \text{min}(* \langle \text{expression} \rangle^*) | \text{normal}(\langle \text{expression} \rangle, \langle \text{expression} \rangle) | \text{exponential}(\langle \text{expression} \rangle) | \text{poisson}(\langle \text{expression} \rangle) | \text{geometric}(\langle \text{expression} \rangle) | \text{random}$
 $\langle \text{term} \rangle ::= \langle \text{primary} \rangle | \langle \text{term} \rangle \times \langle \text{primary} \rangle | \langle \text{term} \rangle \div \langle \text{primary} \rangle | \langle \text{term} \rangle / \langle \text{primary} \rangle | \langle \text{term} \rangle \text{mod} \langle \text{primary} \rangle$
 $\langle \text{sum} \rangle ::= \langle \text{term} \rangle | + \langle \text{term} \rangle | - \langle \text{term} \rangle | \langle \text{sum} \rangle + \langle \text{term} \rangle | \langle \text{sum} \rangle - \langle \text{term} \rangle$
 $\langle \text{unconditional expression} \rangle ::= \langle \text{sum} \rangle | \langle \text{sum} \rangle : \langle \text{sum} \rangle$
 $\langle \text{expression} \rangle ::= \langle \text{unconditional expression} \rangle | \text{if} \langle \text{relation} \rangle \text{ then} \langle \text{expression} \rangle \text{ else} \langle \text{expression} \rangle$

The meaning of the arithmetical operations inside expressions is identical to the meaning in ALGOL 60.

The new elements here are " $a \text{ mod } b$," the positive remainder obtained upon dividing a by b ; " $\text{max}(e_1, \dots, e_n)$ " and " $\text{min}(e_1, \dots, e_n)$," which denote the maximum and minimum values, respectively, of the n expressions; and there are also notations for expressing random values. The expression " (e_1, \dots, e_n) " indicates that a random selection is made from among the n expressions with equal probability of choosing any

expression. The expressions $\text{normal}(M, S)$, $\text{poisson}(M)$, $\text{geometric}(M)$ and $\text{exponential}(M)$ indicate random values with special distributions which occur frequently in applications. A random number drawn from the normal distribution with mean M and standard deviation S is denoted by $\text{normal}(M, S)$ and is a real (not necessarily integer) value. A number drawn from the exponential distribution with mean M is denoted by $\text{exponential}(M)$ and is also of type real. The poisson distribution signified by $\text{poisson}(M)$, on the other hand, yields only integer values; the probability that $\text{poisson}(M) = n$ is $(e^{-M} M^n / n!)$. The geometric distribution with mean M , denoted by $\text{geometric}(M)$, also yields integer values, where the probability that $\text{geometric}(M) = n$ is $1/M(1 - 1/M)^{n-1}$. The symbol random denotes a random real number between 0 and 1 having uniform distribution. Finally, we have the notation $e_1 : e_2$, which denotes a random integer between the limits e_1 and e_2 ; more formally

$$e_1 : e_2 = \begin{cases} 0, & e_1 > e_2 \\ (e_1, e_1 + 1, \dots, e_2) & e_1 \leq e_2. \end{cases}$$

The normal, exponential, poisson and geometric distributions are mathematically expressible in terms of random as follows:

$$\text{normal}(M, S) = S \times \sqrt{-2 \ln(\text{random})} \\ \times \sin(2\pi \text{random}) + M$$

$$\text{exponential}(M) = -M \ln(\text{random})$$

$$\text{poisson}(M) = n \text{ if } e^{-M} \left(1 + M + \frac{M^2}{2!} + \dots + \frac{M^{n-1}}{(n-1)!} \right) \\ \leq \text{random} < e^{-M} \left(1 + M + \dots + \frac{M^n}{n!} \right)$$

$$\text{geometric}(M) = \left\lceil 1 + \ln(\text{random}) / \ln \left(1 - \frac{1}{M} \right) \right\rceil.$$

(The poisson distribution should not be used for values of M greater than 10.) As examples of the use of these distributions, consider a population of customers coming to a market with an average of one customer every M minutes. The distribution of waiting time between successive arrivals is $\text{exponential}(M)$. On the other hand, if an average of M customers come in per hour, the distribution of the actual number of customers arriving in a given hour is $\text{poisson}(M)$. If an individual performs an experiment repeatedly with a chance of success, $1/M$ on each independent trial, the number of trials needed until he first succeeds is $\text{geometric}(M)$.

The special symbol "time" indicates the current time; initially, time is zero. The value of a store name is the current number of occupants of the store.

$$\langle \text{relational operator} \rangle ::= = | \neq | < | \leq | > | \geq \\ \langle \text{relation primary} \rangle ::= \langle \text{unconditional expression} \rangle$$

$$\langle \text{relational operator} \rangle \langle \text{unconditional expression} \rangle | \\ \langle \text{facility name} \rangle \text{ busy} | \langle \text{facility name} \rangle \text{ not busy} | \\ \langle \text{store name} \rangle \text{ full} | \langle \text{store name} \rangle \text{ not full} | \\ \langle \text{store name} \rangle \text{ empty} | \langle \text{store name} \rangle \text{ not empty} | \\ \text{pr}(\langle \text{expression} \rangle) | \langle \text{relation} \rangle \\ \langle \text{relation} \rangle ::= \langle \text{relation primary} \rangle | \\ \langle \text{relation primary} \rangle \vee \langle \text{relation primary} \rangle | \\ \langle \text{relation primary} \rangle \wedge \langle \text{relation primary} \rangle | \\ \neg \langle \text{relation primary} \rangle$$

These relations have obvious meanings except for the construction " $\text{pr}(e)$ " which stands for a random condition which is true with probability e . (Here e must be less than or equal to 1.) Thus we might say

if $\text{pr}(0.12)$ then (12 per cent of the time)
else (88 per cent of the time).

III. STATEMENTS

A. Processes

As this simulator operates, any number of processes written in the language may be in use at once. We may think of several objects, each in its own place in the process at any given time. These objects are referred to as *transactions*. In this section, we describe the various manipulations that transactions can perform in the language.

$$\langle \text{process description} \rangle ::= \text{process } \langle \text{identifier} \rangle ; \\ \langle \text{statement} \rangle | \\ \text{process } \langle \text{identifier} \rangle ; \text{begin} \\ \langle \text{process declaration list} \rangle ; \langle \text{statement list} \rangle \text{end} \\ \langle \text{process declaration} \rangle ::= \langle \text{variable declaration} \rangle | \\ \langle \text{procedure declaration} \rangle | \langle \text{monitor declaration} \rangle \\ \langle \text{process declaration list} \rangle ::= \langle \text{process declaration} \rangle | \\ \langle \text{process declaration list} \rangle ; \langle \text{process declaration} \rangle$$

There are two kinds of variables, *global* variables (not declared in a process) and *local* variables (those which are declared in a process). All transactions can refer to the global variables, and a global variable has only one value at any given time. But a local variable is "carried with" each transaction within a given process, and there is in general, a different value for a local variable depending on which transaction is using it. Transactions situated within one process may not refer to the local variables of another process, nor can the local variables of one transaction within a process be reached directly by other transactions in that same process. Communication between processes is accomplished solely with the help of global quantities.

B. Labels

A statement may be named by any identifier as follows:

$$\langle \text{statement} \rangle ::= \langle \text{unlabeled statement} \rangle | \\ \langle \text{identifier} \rangle : \langle \text{statement} \rangle$$

By the designation (label) we will mean the name of a statement.

C. Creation of Transactions

At the beginning of simulation, there is one transaction present for each process described. Each of these initial transactions starts at time zero and is positioned at the beginning of the process. More transactions may be created by using "start statements."

(start statement)::=new transaction to (label)

This statement, when executed, creates a new transaction (whose local variables are the same in number and value as those of the transaction which created it). The new transaction begins executing the program at (label) while the original transaction continues in sequence. New transactions are also created by input statements (Section III-T).

D. Disappearance of Transactions

Transactions "die" when they execute a cancel statement.

(cancel statement)::=cancel

An implied cancel statement is at the end of every process, so cancel statements need not always be explicitly written.

E. Replacement Statements

(replacement statement)::=(variable name)
←(expression)

This replaces the value of the variable by the value of the expression. The variable may be global or local, but not the name of a store. If the variable is an integer variable, the expression is rounded.

F. Priority

Time is measured in discrete units, so it may happen that by coincidence two transactions want to do something at precisely the same time. They may be in conflict, e.g., they may both want to seize a facility, or to change the value of the same global variable or one may want to change it while the other is using its value. Actually, in such cases of conflict, the simulator does choose a specific order for execution; no two things actually happen at the same instant, as we deal more properly with *infinitesimal* units of time between the discrete units. The choice of order is fairly arbitrary except when a difference of priority is specified; in that case, the transaction with *higher* priority will be acted on first. Each transaction has a priority, which is initially zero; priority is changed by the statement

PRIORITY←(expression).

The declaration "integer PRIORITY" is implied at the beginning of each process, i.e., PRIORITY is treated as a local variable. In the present implementation of SOL, the priority must be between 0 and 63. The effect of priority is spelled out further in Section IV.

G. Wait Statements

(wait statement)::=wait (expression)

The expression is rounded to the nearest integer, and then this statement advances "time" by $\max(0, \langle \text{expression} \rangle)$, as far as this transaction is concerned. All time delays in a simulated process are, in the last analysis, specified by using wait statements.

H. Wait-Until Statements

(wait-until statement)::=wait until (relation)

This causes the transaction to freeze at this point until the relation becomes true (because of action by other transactions). The relation must not involve expressions which have a random value; e.g., it is not legal to write "wait until $\text{pr}(10)$ " or "wait until $\Lambda[1:4]=0$," etc.

I. Enter Statements

(enter statement)::=enter (store name)|
enter (store name), (expression)

The first form is an abbreviation for "enter (store name), 1." The value of the expression, rounded to the nearest integer, gives the number of units requested of the store. The transaction will remain at this statement until that number of units is available and until all other transactions of greater or equal priority which have been waiting for storage space have been serviced.

J. Leave Statement

(leave statement)::=leave (store name)|
leave (store name), (expression)

The first form is an abbreviation for "leave (store name), 1." This statement returns the number of units equivalent to the value of the (rounded) expression.

K. Seize Statements

(seize statement)::=seize (facility name)|
seize (facility name), (expression)

The first form is equivalent to "seize (facility name), 0." This statement is usually rather simple, but there are situations when complications arise. If the facility is not busy when this statement occurs, then it becomes busy at this point and remains busy until later released by this transaction. (Note: If this transaction creates another transaction by means of a start statement, the new transaction does not control the facility.)

The expression appearing above represents the "control strength" which is normally zero. Allowance is made, however, for one transaction to interrupt another. If the facility is busy when the seize statement occurs, let E_1 be the control strength with which the facility was seized and let E_2 be the control strength of this seize statement. If $E_2 \leq E_1$, the transaction waits until the facility is not busy. If $E_2 > E_1$, however, *interrupt* occurs. The transaction T_1 which had control of

the facility is stopped wherever it was in its program, and the present transaction T_2 seizes the facility. When T_2 releases the facility, the following occurs:

- 1) If T_1 was executing a wait statement when interrupted, the time of wait is increased by the time which passed during the interrupt.
- 2) There may be several transactions not waiting to seize this facility. If any of these has a higher control strength than E_1 , then T_1 is interrupted again. The transaction which interrupts is chosen by the normal rules for deciding who obtains control of a facility upon release, as described in the next section.

The control strength in the present implementation of SOL must be an integer between 0 and 4095. This allows interrupts to be nested up to 4095 deep.

L. Release Statements

$\langle \text{release statement} \rangle ::= \text{release } \langle \text{facility name} \rangle$

This statement is permitted only when the transaction is actually controlling the facility because of a previous seizure. When the facility is released, there may be several other transactions waiting because of seize statements. In this case, the one which gets control of the facility next is chosen by a consideration of the following three quantities in order:

- 1) highest control strength,
- 2) highest PRIORITY,
- 3) first to request the facility.

M. Go To Statements

$\langle \text{go to statement} \rangle ::= \text{go to } \langle \text{label} \rangle |$
 $\text{go to } (*\langle \text{label} \rangle *), \langle \text{expression} \rangle$

This statement is used to transfer to another point in the program; statements are usually executed sequentially. In the second form, the expression is used to select which statement to transfer to; if there are n labels, the expression, when rounded to the nearest integer, must have a value between 0 and n . Zero means continue in sequence, 1 means go to the first statement mentioned, and so on.

N. Compound Statements

Several statements may be combined into one, as follows:

$\langle \text{statement list} \rangle ::= \langle \text{statement} \rangle | \langle \text{statement list} \rangle ;$
 $\langle \text{statement} \rangle$
 $\langle \text{compound statement} \rangle ::= \text{begin } \langle \text{statement list} \rangle \text{ end} |$
 $((\text{statement list}))$

O. Conditional Statements

$\langle \text{conditional} \rangle ::= \text{if } \langle \text{relation} \rangle \text{ then } \langle \text{unconditional statement} \rangle |$
 $\text{if } \langle \text{relation} \rangle \text{ then } \langle \text{unconditional statement} \rangle \text{ else } \langle \text{statement} \rangle$

The meaning is the same as in ALGOL; testing of the relation requires no simulated time.

P. Tabulate Statements

$\langle \text{tabulate statement} \rangle ::= \text{tabulate } \langle \text{expression} \rangle \text{ in } \langle \text{table name} \rangle$

The value of the expression is recorded as a statistical observation in the table specified.

Q. Output Statements

$\langle \text{carriage control} \rangle ::= \langle \text{empty} \rangle | \text{page} | \text{line} | \text{double}$
 $\langle \text{string} \rangle ::= \langle \text{any sequence of characters excluding "}" \rangle$
 $\langle \text{output list item} \rangle ::= \# \langle \text{string} \rangle | \langle \text{expression} \rangle |$
 $\langle \text{store name} \rangle | \langle \text{table name} \rangle | \langle \text{facility name} \rangle$
 $\langle \text{output statement} \rangle ::= \text{output } * \langle \text{carriage control} \rangle$
 $\langle \text{output list item} \rangle *$

Output occurs for all items listed, in turn, after doing the appropriate carriage control positioning. The output for a string is the string itself. An output for an expression is the value. For a store, table or facility, the appropriate statistical information is output. At the conclusion of an output statement, the final line is printed out.

R. Stop Statements

$\langle \text{stop statement} \rangle ::= \text{stop}$

A stop statement causes simulation to terminate immediately, and all transactions cease. The statistics for all stores, tables and facilities are output as in the output statement, as well as the final time, the number of times each labeled statement was referenced and the number of transactions which appeared in each process.

S. Procedures

$\langle \text{procedure declaration} \rangle ::= \text{procedure } \langle \text{identifier} \rangle ;$
 $\langle \text{statement} \rangle$
 $\langle \text{procedure statement} \rangle ::= \langle \text{procedure name} \rangle$

A procedure is simply a subroutine used to save coding. Parameters are not allowed, but their effect can be achieved by setting local variables in the transactions before calling the procedure. There are local procedures and global procedures (the latter are declared outside of a process). Global procedures cannot refer to local variables. A go to statement may not lead out of a procedure body. Procedures may be used recursively.

T. Transaction Input-Output

$\langle \text{transaction read statement} \rangle ::= \text{read } \langle \text{constant} \rangle \text{ to } \langle \text{label} \rangle$
 $\langle \text{transaction write statement} \rangle ::= \text{write } \langle \text{constant} \rangle$

The read statement inputs a set of values of local variables for a transaction of the same type as the one executing the read statement; this set of values is used in the creation of a new transaction which begins exe-

cutting the program at the statement mentioned. The write statement writes the current values of the local variables of the transaction onto the unit specified and does not cancel the present transaction. The constant in each refers to a tape or card unit number. The same tape should not be used for both input and output in the same simulation run.

U. Summary of Statements

```

<unlabeled statement>::= <unconditional statement>|
<conditional>
<unconditional statement>::= <start statement>|
<cancel statement>|
<replacement statement>| <wait statement>|
<wait-until statement>| <enter statement>|
<leave statement>| <seize statement>|
<release statement>| <go to statement>|
<compound statement>| <output statement>|
<tabulate statement>| <stop statement>|
<transaction read statement>| <procedure statement>|
<transaction write statement>| <empty>

```

IV. THE MODEL AS A WHOLE

```

<model>::= begin <global declaration list>; <process list>
end.
<declaration>::= <variable declaration>|
<facility declaration>|
<store declaration>| <table declaration>|
<monitor declaration>| <procedure declaration>
<global declaration list>::= <declaration>|
<global declaration list>; <declaration>
<process list>::= <process sdescription>|
<process list>; <process description>

```

Initially all variables are zero, all facilities are "not busy," all stores are "empty," the time is zero, one transaction appears for each process described and the simulator is in the "choice state."

When the simulator is in "choice state," each transaction is either positioned at a wait statement, a wait-until statement, a seize or enter statement or else it has

just been created. (We will dispense with the latter case by assuming a "wait 0" statement has been inserted just before the present position when a new transaction is created.) If there are no transactions which can move at this time, the time is advanced to the earliest completion time for a wait statement. Now, from the set of transactions able to move, that one is selected which has the highest PRIORITY, and in case of ties, which has been waiting the longest. (If there is still a tie, an arbitrary choice is made.) The selected transaction is activated, and it continues to execute its statements until encountering a cancel or stop statement, a priority assignment statement, a wait statement, a wait-until statement with a false relation or a seize or enter statement which cannot take place at that time. We examine all other transactions which are stopped because of a wait-until statement involving global quantities changed by the present transaction. If the corresponding relation is now true, these transactions become free to move at the current time. Then we have once again reached "choice state." Note that all release statements which are passed during the time the selected transaction was moving are processed immediately in such a way that the facility becomes not busy only if no other transaction were interrupted or were waiting to seize it; if other transactions are in the latter category, the choice of successor and the transfer of control described in Section III-L takes place immediately as the release statement is executed. Therefore, it is conceivable that the statement "wait until FAC not busy" may never be passed if other transactions are always ready to seize the facility FAC. Similar remarks apply to the leave statements.

Since this paper was written, a few additions have been made to the SOL language, including "synchronous" variables and some additional diagnostic capabilities.

REFERENCES

- [1] "Revised report on the algorithmic language ALGOL 60," *Comm. ACM*, pp. 1-17; January 6, 1963.
- [2] D. E. Knuth and J. L. McNeley, "SOL—A symbolic language for general-purpose systems simulation," this issue, page 401.

CHAPTER IV

Differences in Atlas SOL

A. Some character and phrase substitutions have been made to suit the Atlas character set. These are as follows:

	<u>SOL</u>	<u>Atlas SOL</u>
(1)	[(
(2)])
(3)	;	New line or new card
(4)	x	*
(5)	<-	=
(6)	=	.EQ.
(7)	≠	.NE.
(8)	<	.LT.
(9)	≤	.LE.
(10)	>	.GT.
(11)	≥	.GE.
(12)	:) after a label
(13)	:	in < sum > : < sum >
(14)	#	'
(15)	busy	.BUSY
(16)	not busy	.NOT BUSY
(17)	full	.FULL
(18)	not full	.NOT FULL
(19)	empty	.EMPTY
(20)	not empty	.NOT EMPTY

(21) Spaces are ignored everywhere including text to be output. In the case of text to be output * is interpreted as space. For example OUTPUT A, '***THIS*IS*TEXT**', B will be printed

54 THIS IS TEXT 129

(22) All letters are upper case. It is therefore unwise to use syntactically meaningful letter combinations as identifiers or as the first characters of an identifier. WAIT or OUTPUTABC would not be wise choices for identifiers. Only the first eight characters of identifiers are recognised although identifiers may be of arbitrary length, hence the first eight characters must uniquely define an identifier.

B. Other syntactic changes are as follows:

- (1) Statements or declarations may be terminated by either end of line or π . Where there is no ambiguity no terminator is necessary. For example the following sequences are equivalent

(i)	BEGIN	(ii)	BEGIN INTEGER I,J, π
	INTEGER I,J		REAL K
	REAL K		

(iii) BEGIN π INTEGER I,J π REAL K π

- (2) The dictionaries for identifiers and labels (procedure names are treated as labels) are distinct and the same names may appear in each. All labels must be distinct and there is no check that jumps from one transaction to another are not made and this could cause trouble. The names of local variables are local to a process.

C. A few changes have also been made in the interpretation of statements.

- (1) If not explicit in a seize statement, the seize strength is taken to be one, not zero. SEIZE FAC,0 has the effect of making the facility NOT BUSY but is not recommended as the facility is not released correctly.
- (2) There is no check that transactions do not release store not entered by them.
- (3) The cancel statement does not release the facilities or leave the stores associated with the transaction.
- (4) TIME is a preloaded integer which may, in fact, be used on the left hand side of an expression, probably with disastrous effects.

D. Two extra statements have been included:

- (1) DUMP-this statement causes all the variables, stores, facilities and tables to be printed together with information about each transaction. The dumping is in octal and is designed as a 'last ditch' debugging aid.
- (2) CODE. This statement causes the code produced by the compiler to be dumped and also the jump table and the directories. This statement can be used in conjunction with the DUMP statement.

CHAPTER V

Compile time diagnostics

- | | |
|-------------------------------------|--|
| (1) IDENTIFIER NOT DEFINED | no corresponding REAL, INTEGER, or FACILITY declaration |
| (2) IDENTIFIER DEFINED TWICE | caused by a REAL, INTEGER, or FACILITY declaration |
| (3) IDENTIFIER DEFINED TWICE, STORE | caused by STORE declaration |
| (4) IDENTIFIER DEFINED TWICE, TABLE | caused by TABLE declaration |
| (5) INSTRUCTION NOT RECOGNISED | The SOL declarations or any process is syntactically checked before the more detailed compilation takes place. Any failure in this checking will cause the above diagnostic which will be printed after the first line which could not be recognised. In general the compilation will have difficulty proceeding and will continue producing erroneous INSTRUCTION NOT RECOGNIZED on the rest of the source material |
| (6) LABEL SET TWICE | self explanatory |
| (7) STORE BUSY | non-facility found in a .BUSY or .NOT BUSY relation |
| (8) FACILITY FULL | non-store found in a .FULL etc relation |
| (9) NON STORE IN ENTER | faulty enter statement |
| (10) NON STORE IN LEAVE | faulty leave statement |
| (11) NON FAC IN SEIZE | faulty seize statement |
| (12) NON FAC IN RELEASE | faulty release statement |
| (13) L.H.S. NOT VAR | left hand side of a replacement statement is not real or integer |
| (14) FAC. OR TAB. IN EXPRESSION | facility or table used in an expression |

CHAPTER VI

Run time diagnostics

- | | |
|----------------------------|---|
| (1) END OF SIMULATION | caused by the stop statement |
| (2) NOTHING TO DO | all transactions halted |
| (3) ILLEGAL SEIZE | transaction seizing a facility
it already controls |
| (4) NEGATIVE SEIZE | negative seize strength |
| (5) ILLEGAL RELEASE | transaction releasing a facility
it does not control |
| (6) LEAVE NEGATIVE | transaction leaving a negative
amount of store |
| (7) LEAVE TOO BIG | transaction leaving more store
than has been entered. |
| (8) ENTER NEGATIVE | transaction entering a negative
amount of store |
| (9) ENTER TOO BIG | transaction trying to enter
more store than the capacity of
the store |
| (10) TABULATE OUT OF RANGE | tabulated quantity out of range
of the table |

Both NOTHING TO DO and END OF SIMULATION will be followed by the statistics. After an error, the simulation will attempt to continue and the statement in error will be omitted. This would probably, of course, cause further errors.

CHAPTER VII

Limitations

In general all arithmetic is executed in floating point and a number is truncated if an integer is required at any stage.

Real variables and expressions are printed with 8 places before the decimal point and 4 after. Integers are printed with a maximum of 8 digits.

Seize strengths and priorities may be from 0 to 1048575.

The size of program which can be compiled is governed by two factors - the store request, and the size of the largest process (or maybe the size of the global declarations if these are large). The exact size is difficult to estimate but processes of 150 lines have been compiled successfully.

There is no check on array bounds.

CHAPTER VIII

Sample program output

There follows a listing of the sample problem given by Knuth and McNeley rewritten in Atlas SOL. The program is prefaced by the job description to give the user some idea of the store and time requirements of a typical program. The final END card would normally be followed by a file card but in this case it is followed immediately by the program output. A listing of the program is always produced before execution.

JOB SOL EXAMPLE
 COMPUTING 12500 INSTRUCTIONS
 STORE 45/70 BLOCKS
 OUTPUT 0 LINE PRINTER 700 LINES
 TAPE 1 S.R.C. COMPILERS
 COMPILER SPECIAL
 SOL

```

BEGIN
  FACILITY TU(6),SB(3),LINE,COMPUTER
  INTEGER TUSTATE(6),SBNUMBER(6),TUMESSAGE(6)
  TABLE (2000 STEP 500 UNTIL 15000)TABLE(6)
  STORE 10 QUEUE(6)

PROCESS MASTER CONTROL
  BEGIN SBNUMBER(1)=1 SBNUMBER(2)=2
    SBNUMBER(3)=1 SBNUMBER(4)=2
    SBNUMBER(5)=1 SBNUMBER(6)=3
  WAIT 360000 STOP END

PROCESS USERS
  BEGIN INTEGER Q,START TIME,MESSAGE TYPE
  NEW TRANSACTION TO START NEW TRANSACTION TO START
  ORIGIN) NEW TRANSACTION TO START WAIT 0.5000 GO TO ORIGIN
  START) Q=1.6 ENTER QUEUE(Q)
  MESSAGE TYPE=(1,1,2,2,2,2,3,3,3)
  SEIZE TU(0)
  TUMESSAGE(Q)=MESSAGE TYPE
  WAIT 6000.0000
  START TIME=TIME
  OUTPUT 'TU',Q,'*****SENDS*MESSAGE',MESSAGE TYPE,'*****AT*TIME',TIME
  TUSTATE(Q)=1
  WAIT UNTIL TUSTATE(Q).EQ.0
  RELEASE TU(Q) LEAVE QUEUE(Q)
  TABULATE (TIME-START TIME) IN TABLE(Q)
  OUTPUT '*****TU',Q,'*****RECIEVES*REPLY*AT*TIME',TIME
  CANCEL END

PROCESS PBU BEGIN INTEGER S,T,WORDS
  NEW TRANSACTION TO SCAN T=3
  SCAN) T=T+1 IF T.GT.6 THEN T=1 WAIT 1
    S=SBNUMBER(T)
    SEIZE LINE
    WAIT 5 IF SB(S).BUSY THEN (WAIT 80 RELEASE LINE GO TO SCAN)
    SEIZE SB(S) WAIT 15 IF TUSTATE(T).NE.1 THEN(WAIT 65
      RELEASE LINE RELEASE SB(S) GO TO SCAN)
    WAIT 225 SEND WAIT 170 IF PR(0.02) THEN (WAIT 20 GO TO SEND)
    NEW TRANSACTION TO COMPUTATION WAIT 20 RELEASE SB(S)
    RELEASE LINE TUSTATE(T)=2 CANCEL
  COMPUTATION) SEIZE COMPUTER WORDS=TUMESSAGE(T)+2
    WAIT(IF WORDS.EQ.3 THEN 250 ELSE IF WORDS.EQ.4 THEN 300 ELSE 400)
    RELEASE COMPUTER
  OUTPT) WAIT 1 SEIZE LINE WAIT 5
    IF SB(S).BUSY THEN (WAIT 80 RELEASE LINE GO TO OUTPT)
    SEIZE SB(S) WAIT 75
  RECEIVE) WAIT 80 IF PR(0.01) THEN (WAIT 20 GO TO RECEIVE)
    RELEASE LINE
    WORDS=WORDS-1
    IF WORDS.EQ.0 THEN NEW TRANSACTION TO SCAN
    WAIT 325 RELEASE SB(S) WAIT 170
    IF WORDS.GT.0 THEN GO TO OUTPT
    TUSTATE(T)=0 CANCEL END

PROCESS OTHER PBUS
  BEGIN INTEGER I I=6
  CREATE) NEW TRANSACTION TO COMPUTE
    I=I-1 IF I.GT.0 THEN GO TO CREATE CANCEL
  COMPUTE) WAIT 3200.5000 SEIZE COMPUTER
    WAIT (250,250,300,300,300,300,300,300,400,400)
    RELEASE COMPUTER GO TO COMPUTE ENH
  END
  
```


TU	6	SENDS MESSAGE	1	AT TIME	6546
TU	3	SENDS MESSAGE	2	AT TIME	7532
TU	1	SENDS MESSAGE	3	AT TIME	7704
TU	6	RECIEVES REPLY AT TIME			9810
TU	1	RECIEVES REPLY AT TIME			13248
TU	2	SENDS MESSAGE	2	AT TIME	14390
TU	3	RECIEVES REPLY AT TIME			14423
TU	2	RECIEVES REPLY AT TIME			18152
TU	1	SENDS MESSAGE	1	AT TIME	20172
TU	3	SENDS MESSAGE	1	AT TIME	20979
TU	1	RECIEVES REPLY AT TIME			23159
TU	2	SENDS MESSAGE	2	AT TIME	25651
TU	3	RECIEVES REPLY AT TIME			26467
TU	1	SENDS MESSAGE	3	AT TIME	29706
TU	2	RECIEVES REPLY AT TIME			30114
TU	6	SENDS MESSAGE	2	AT TIME	32347
TU	3	SENDS MESSAGE	2	AT TIME	33747
TU	1	RECIEVES REPLY AT TIME			35001
TU	6	RECIEVES REPLY AT TIME			36358
TU	2	SENDS MESSAGE	1	AT TIME	37507
TU	5	SENDS MESSAGE	3	AT TIME	37936
TU	3	RECIEVES REPLY AT TIME			39065
TU	2	RECIEVES REPLY AT TIME			41078
TU	1	SENDS MESSAGE	3	AT TIME	42975
TU	5	RECIEVES REPLY AT TIME			43521
TU	6	SENDS MESSAGE	2	AT TIME	44910
TU	1	RECIEVES REPLY AT TIME			318350
TU	5	RECIEVES REPLY AT TIME			319030
TU	3	SENDS MESSAGE	1	AT TIME	319619
TU	4	SENDS MESSAGE	1	AT TIME	320555
TU	2	RECIEVES REPLY AT TIME			322250
TU	6	RECIEVES REPLY AT TIME			323066
TU	3	RECIEVES REPLY AT TIME			324769
TU	5	SENDS MESSAGE	3	AT TIME	325871
TU	4	RECIEVES REPLY AT TIME			325948
TU	2	SENDS MESSAGE	2	AT TIME	329381
TU	5	RECIEVES REPLY AT TIME			330182
TU	3	SENDS MESSAGE	1	AT TIME	331590
TU	2	RECIEVES REPLY AT TIME			333560
TU	3	RECIEVES REPLY AT TIME			334481
TU	1	SENDS MESSAGE	3	AT TIME	335006
TU	1	RECIEVES REPLY AT TIME			339821
TU	2	SENDS MESSAGE	3	AT TIME	340371
TU	4	SENDS MESSAGE	2	AT TIME	341458
TU	3	SENDS MESSAGE	2	AT TIME	341820
TU	2	RECIEVES REPLY AT TIME			344806
TU	3	RECIEVES REPLY AT TIME			346163
TU	5	SENDS MESSAGE	2	AT TIME	347808
TU	4	RECIEVES REPLY AT TIME			348864
TU	2	SENDS MESSAGE	1	AT TIME	351765
TU	5	RECIEVES REPLY AT TIME			351912
TU	6	SENDS MESSAGE	2	AT TIME	352493
TU	3	SENDS MESSAGE	1	AT TIME	353549
TU	2	RECIEVES REPLY AT TIME			354698
TU	1	SENDS MESSAGE	3	AT TIME	354974
TU	4	SENDS MESSAGE	2	AT TIME	356486
TU	6	RECIEVES REPLY AT TIME			356606
TU	3	RECIEVES REPLY AT TIME			357202
TU	5	SENDS MESSAGE	3	AT TIME	359688

END OF SIMULATION

CLOCK TIME AT END OF SIMULATION WAS 340000

NUMBER OF TIMES LABELS WERE ENCOUNTERED

LABEL	-	COUNT	LABEL	-	COUNT	LABEL	-	COUNT
START	-	150	ORIGIN	-	148	SCAN	-	1993
SEND	-	141	COMPUTAT	-	138	OUTPT	-	649
RECEIVE	-	564	CREATE	-	6	COMPUTE	-	477

NAME OF FACILITY

FRACTION OF TIME IN USE

TU	(001)	0.7389
TU	(002)	0.9145
TU	(003)	1.0000
TU	(004)	0.7281
TU	(005)	0.5014
TU	(006)	0.6470
SB	(001)	0.5967
SB	(002)	0.4437
SB	(003)	0.1959
LINE	(001)	0.8771
COMPUTER	(001)	0.5412

NAME OF STORE	CAPACITY	MAXIMUM USED	AVERAGE OCCUPANCY	AVERAGE UTILIZATION
QUEUE (001)	10	5	1.6720	0.1672
QUEUE (002)	10	6	2.4227	0.2422
QUEUE (003)	10	8	3.6986	0.3698
QUEUE (004)	10	5	1.7048	0.1704
QUEUE (005)	10	4	0.7010	0.0701
QUEUE (006)	10	3	0.8416	0.0841

TABLE NAME IS TABLE (001)

NUMBER OF TABLE ENTRIES IS 22 SUM OF ALL ENTRY VALUES 99930.0000

MEAN OF TABLE	4542.2727	STANDARD DEVIATION	1276.9288	
UPPER LIMIT	NUMBER	PER CENT	CUMULATIVE	MULTIPLE OF MEAN
2000		0.00	0.00	0.4403
2500		0.00	0.00	0.5503
3000	3	13.63	13.63	0.6604
3500	1	4.54	18.18	0.7705
4000	5	22.72	40.90	0.8806
4500	4	18.18	59.09	0.9906
5000	1	4.54	63.63	1.1007
5500	4	18.18	81.81	1.2108
6000	1	4.54	86.36	1.3209
6500	1	4.54	90.90	1.4310
7000		0.00	90.90	1.5410
7500	2	9.09	99.99	1.6511
8000		0.00	99.99	1.7612
8500		0.00	99.99	1.8713
9000		0.00	99.99	1.9813
9500		0.00	99.99	2.0914
10000		0.00	99.99	2.2015
10500		0.00	99.99	2.3116
11000		0.00	99.99	2.4216
11500		0.00	99.99	2.5317
12000		0.00	99.99	2.6418
12500		0.00	99.99	2.7519
13000		0.00	99.99	2.8620
13500		0.00	99.99	2.9720
14000		0.00	99.99	3.0821
14500		0.00	99.99	3.1922
15000		0.00	99.99	3.3023

TABLE NAME IS TABLE (002)

129652.0000

SUM OF ALL ENTRY VALUES

1318.5882

28

4630.4285

STANDARD DEVIATION

NUMBER OF TABLE ENTRIES IS

MEAN OF TABLE

UPPER LIMIT	NUMBER	PER CENT	CUMULATIVE	MULTIPLE OF MEAN
2000		0.00	0.00	0.4319
2500		0.00	0.00	0.5399
3000	2	7.14	7.14	0.6478
3500	1	3.57	10.71	0.7558
4000	4	14.28	24.99	0.8638
4500	1	35.71	60.71	0.9718
5000	6	21.42	82.14	1.0798
5500		0.00	82.14	1.1877
6000	1	3.57	85.71	1.2957
6500	1	3.57	89.28	1.4037
7000	1	3.57	92.85	1.5117
7500		0.00	92.85	1.6197
8000	1	3.57	96.42	1.7277
8500		0.00	96.42	1.8356
9000	1	3.57	99.99	1.9436
9500		0.00	99.99	2.0516
10000		0.00	99.99	2.1596
10500		0.00	99.99	2.2676
11000		0.00	99.99	2.3755
11500		0.00	99.99	2.4835
12000		0.00	99.99	2.5915
12500		0.00	99.99	2.6995
13000		0.00	99.99	2.8075
13500		0.00	99.99	2.9154
14000		0.00	99.99	3.0234
14500		0.00	99.99	3.1314
15000		0.00	99.99	3.2394

TABLE NAME IS TABLE (003)						
NUMBER OF TABLE ENTRIES IS		30		SUM OF ALL ENTRY VALUES.		
MEAN OF TABLE	4930.6000	STANDARD DEVIATION	1157.1875	147918.0000		
UPPER LIMIT	NUMBER	PER CENT	CUMULATIVE	MULTIPLE OF MEAN		
2000	1	0.00	0.00	0.4056		
2500	1	0.00	0.00	0.5070		
3000	1	3.33	3.33	0.6084		
3500	1	3.33	6.66	0.7098		
4000	7	23.33	30.00	0.8112		
4500	3	10.00	39.99	0.9126		
5000	3	10.00	50.00	1.0140		
5500	6	19.99	69.99	1.1154		
6000	4	13.33	83.33	1.2168		
6500	2	6.66	89.99	1.3182		
7000	2	6.66	96.66	1.4197		
7500	1	0.00	96.66	1.5211		
8000	1	3.33	99.99	1.6225		
8500	1	0.00	99.99	1.7239		
9000	1	0.00	99.99	1.8253		
9500	1	0.00	99.99	1.9267		
10000	1	0.00	99.99	2.0281		
10500	1	0.00	99.99	2.1295		
11000	1	0.00	99.99	2.2309		
11500	1	0.00	99.99	2.3323		
12000	1	0.00	99.99	2.4337		
12500	1	0.00	99.99	2.5351		
13000	1	0.00	99.99	2.6365		
13500	1	0.00	99.99	2.7380		
14000	1	0.00	99.99	2.8394		
14500	1	0.00	99.99	2.9408		
15000	1	0.00	99.99	3.0422		

TABLE NAME IS TABLE (004)

97729.0000

SUM OF ALL ENTRY VALUES

22

NUMBER OF TABLE ENTRIES IS

870.2028

STANDARD DEVIATION

4442.2272

MEAN OF TABLE

UPPER LIMIT	NUMBER	PER CENT	CUMULATIVE	MULTIPLE OF MEAN
2000		0.00	0.00	0.4502
2500		0.00	0.00	0.5627
3000		0.00	0.00	0.6753
3500	4	18.18	18.18	0.7878
4000	2	9.09	27.27	0.9004
4500	7	31.81	59.09	1.0130
5000	6	27.27	86.36	1.1255
5500	2	9.09	95.45	1.2381
6000		0.00	95.45	1.3506
6500		0.00	95.45	1.4632
7000		0.00	95.45	1.5757
7500	1	4.54	99.99	1.6883
8000		0.00	99.99	1.8008
8500		0.00	99.99	1.9134
9000		0.00	99.99	2.0260
9500		0.00	99.99	2.1385
10000		0.00	99.99	2.2511
10500		0.00	99.99	2.3636
11000		0.00	99.99	2.4762
11500		0.00	99.99	2.5887
12000		0.00	99.99	2.7013
12500		0.00	99.99	2.8139
13000		0.00	99.99	2.9264
13500		0.00	99.99	3.0390
14000		0.00	99.99	3.1515
14500		0.00	99.99	3.2641
15000		0.00	99.99	3.3766

TABLE NAME IS		TABLE	(005)	SUM OF ALL ENTRY VALUES	
NUMBER OF TABLE ENTRIES IS	14	STANDARD DEVIATION	1678.4334	74101.0000	
MEAN OF TABLE	5292.9285				
UPPER LIMIT	NUMBER	PER CENT	CUMULATIVE	MULTIPLE OF MEAN	
2000		0.00	0.00	0.3778	
2500		0.00	0.00	0.4723	
3000		0.00	0.00	0.5667	
3500	2	14.28	14.28	0.6612	
4000	5	0.00	14.28	0.7557	
4500	1	35.71	50.00	0.8501	
5000		7.14	57.14	0.9446	
5500	2	0.00	57.14	1.0391	
6000		14.28	71.42	1.1335	
6500	2	0.00	71.42	1.2280	
7000		14.28	85.71	1.3225	
7500	2	0.00	85.71	1.4169	
8000		0.00	85.71	1.5114	
8500	1	7.14	92.85	1.6059	
9000	1	7.14	99.99	1.7003	
9500	1	0.00	99.99	1.7948	
10000		0.00	99.99	1.8893	
10500		0.00	99.99	1.9837	
11000		0.00	99.99	2.0782	
11500		0.00	99.99	2.1727	
12000		0.00	99.99	2.2671	
12500		0.00	99.99	2.3616	
13000		0.00	99.99	2.4561	
13500		0.00	99.99	2.5505	
14000		0.00	99.99	2.6450	
14500		0.00	99.99	2.7395	
15000		0.00	99.99	2.8339	

TABLE NAME IS TABLE (006)

91627.0000

SUM OF ALL ENTRY VALUES

20

NUMBER OF TABLE ENTRIES IS

1180.9796

STANDARD DEVIATION

4581.3500

MEAN OF TABLE

MULTIPLE OF MEAN

CUMULATIVE

PER CENT

NUMBER

UPPER LIMIT

2000			0.00	0.00	0.4365
2500			0.00	0.00	0.5456
3000			0.00	0.00	0.5548
3500			10.00	10.00	0.7639
4000	2		19.99	30.00	0.8731
4500	4		30.00	60.00	0.9822
5000	6		10.00	69.99	1.0913
5500	2		14.99	84.99	1.2005
6000	3		5.00	89.99	1.3096
6500	1		0.00	89.99	1.4187
7000	1		5.00	94.99	1.5279
7500			0.00	94.99	1.6370
8000			0.00	94.99	1.7462
8500	1		5.00	99.99	1.8553
9000			0.00	99.99	1.9644
9500			0.00	99.99	2.0736
10000			0.00	99.99	2.1827
10500			0.00	99.99	2.2919
11000			0.00	99.99	2.4010
11500			0.00	99.99	2.5101
12000			0.00	99.99	2.6193
12500			0.00	99.99	2.7284
13000			0.00	99.99	2.8375
13500			0.00	99.99	2.9467
14000			0.00	99.99	3.0558
14500			0.00	99.99	3.1650
15000			0.00	99.99	3.2741

SOL EXAMPLE

DATE 19.12.66
TIME 15.52.41
SERIAL NUMBER 15537143

INSTRUCTION INTERRUPTS	REQUESTED	USED	COMPILE
COMPILE STORE	12500	10364	1098
EXECUTION STORE	70	68	
	45	40	
MAGNETIC TAPES	DECKS	BLOCKS	WAITING
	2	32	15
	STORE TIME	DRUM TIME	DECK TIME
	4058	1	156
COMPILER NUMBER	29		

INPUT 0 2 BLOCKS READER 0
OUTPUT 0 564 RECORDS PRIVATE TAPE